

MB 120



construction materials: PP - PVDF




PP

Intake connection	G 2" m	
Delivery connections	G 1" 1/2 m	
Max. flow rate*	25 m ³ /h	
Max. head*	16 m	
Seal	TL - TS	
Motor power	1.5 kW - 2 HP	
Motor	IP55 - F Class - 2-pole - 230/400 V 50 Hz - three-phase - 2900 RPM	
Diameter of passing solids	6 mm	
Max. viscosity	500 cps	
Net weight	PP	20 Kg
	PVDF	21 Kg
		60°C Max. temp.
		90°C Max. temp.

* The curves and performance values refer to pumps spare delivery outlet and water at 20°C.


TECHNICAL DATA

PERFORMANCE

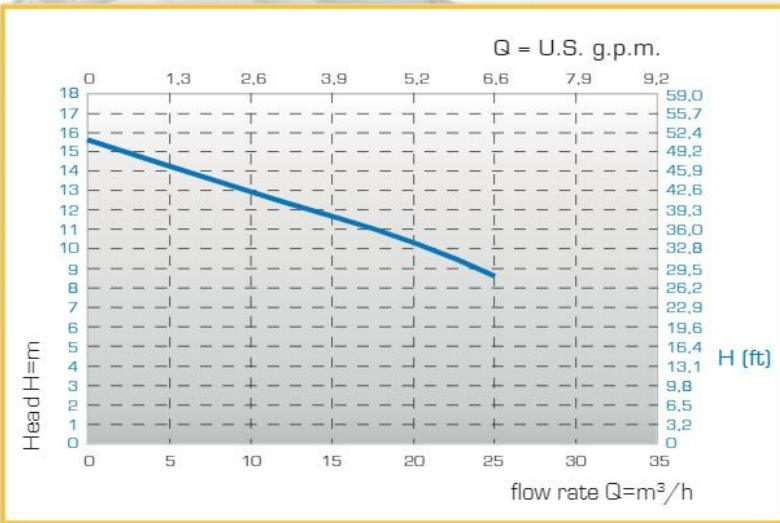

PVDF

DIMENSIONS

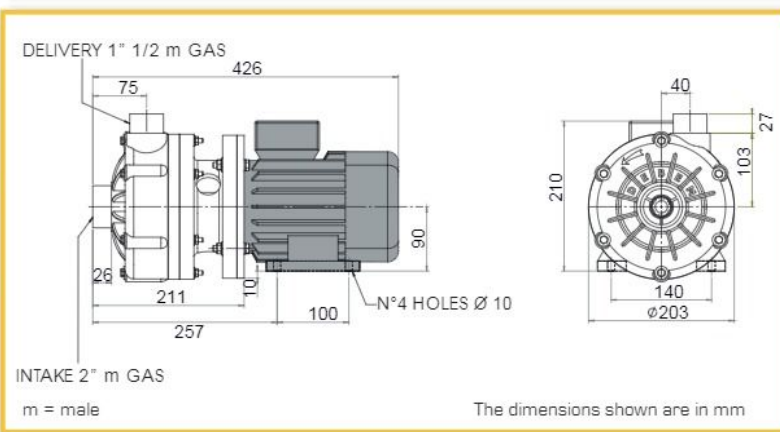

All the values shown are approximate and not binding