

KM 70



Specifications and types



Suction fittings	G 3" 1 or DN 80 - NPT on request
Delivery fittings	G 2" 1/2 or DN 65 - NPT on request
Max flow rate	65 m ³ /h
Max head	29 m
Viscosity up to	150 cps



PP




PVDF



Operating temperature and weights:	
PP	from + 3°C to + 65°C, 33 Kg
PVDF	from + 3°C to + 95°C, 34,5 Kg

MAIN APPLICATION SECTORS

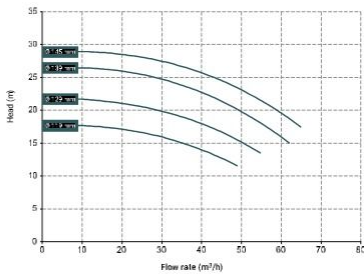

Standard electric motor:
Kw 4 HP 5.5
 Casing B3+B5 RPM 2900
Three-phase 230/400 V - 50/60 HZ
 ATEX available on request

Kw 5.5 HP 7.5
 Casing B3+B5 RPM 2900
Three-phase 400/690 V - 50/60 HZ
 ATEX available on request

Kw 7.5 HP 10
 Casing B3+B5 RPM 2900
Three-phase 400/690 V - 50/60 HZ
 ATEX available on request

The curves and the performances refer to pumps with immersed suction and open delivery outlet, with water at 20°C and vary based on the composition materials and 50 Hz two-pole motor (2900 rpm).



IMPELLER	
Ø 145 mm	(Standard)
Ø 139 mm	
Ø 129 mm	
Ø 119 mm	