

Lutz Drum Pump Sets



Electric or Air driven Drum Pump Set for Acids and Base solutions

Include:

Motor B36 with 16 ft cord or MD2xL air motor, pump tube PP 39" sealless, high head impeller, Hastelloy C shaft, PP Barrel Adaptor, 3/4" PP Nozzle, 8' PVC Hose, Hose Clamps, Wall Hanger



B36



MD2xL Air motor

Type of motor:

Technical Data:

Motor:	120 V, 0.85 HP, ODP	1.36 HP, 87 PSI, 53 CFM
Max. Viscosity:	760 CPS	1,000 CPS*
Max. Capacity:	13.2 GPM	13.2 GPM
Max. spec. Gravity:	1.4	2.8

Immersion depth:	39"	39"
Order-No.	0205-111-1	0205-111-2
Immersion depth:	47"	47"
Order-No.	0205-112-1	0205-112-2
Immersion depth:	55"	55"
Order-No.	0205-113-1	0205-113-2

*Max. 760 CPS is with hand nozzle



Electric or Air driven Drum Pump Set for Highly Corrosive Acids and Base solutions

Include:

Motor B55T-5 with 16 ft cord or MD2xL air motor, pump tube PVDF 39" sealless, high head impeller, Hastelloy C shaft, PP Barrel Adaptor, 1" PVDF Nozzle with swivel, 8' Chemical Hose, Hose Clamps, Wall Hanger



B55T-5



MD2xL Air motor

Type of motor:

Technical Data:

Motor:	120 V, 0.68 HP, TEFC	1.36 HP, 87 PSI, 53 CFM
Max. Viscosity:	760 CPS	1,000 CPS*
Max. Capacity:	13.2 GPM	13.2 GPM
Max. spec. Gravity:	1.6	2.8

Immersion depth:	39"	39"
Order-No.	0205-201-1	0205-201-2
Immersion depth:	47"	47"
Order-No.	0205-202-1	0205-202-2
Immersion depth:	55"	55"
Order-No.	0205-203-1	0205-203-2

*Max. 760 CPS is with hand nozzle



Lutz Pumps, Inc.

1160 Beaver Run Road · Norcross, GA 30093-4898 · Phone: (770) 925-1222 or (800) 843-3901 · Fax: (770) 923-0334
 E-Mail: info@lutzpumpsamerica.com · www.lutzpumpsamerica.com

Lutz Drum Pump Sets



Electric or Air Driven Drum Pump Sets for Flammables, Hazardous Locations

Include:

Motor ME I 6 EX, Class I Group C&D, Class II Groups F&G (Explosion-proof) with 16 ft cord or MD2xL air motor, pump tube SS 39" sealless, high head impeller 1" SS Barrel Adaptor, 1" SS Nozzle with swivel, 8 ft. Conductive Chemical Tubing with Conductive Fittings, Ground & Bonding wires, Wall Hanger



Type of motor:

Technical Data:

	ME I 6 (Ex)	MD2xL Air motor (Ex)
Motor:	120 V, 0.68 HP, TEFC	1.36 HP, 87 PSI, 53 CFM
Max. Viscosity:	750 CPS	1,000 CPS*
Max. Capacity:	13.2 GPM	13.2 GPM
Max. spec. Gravity:	1.6	2.8
Immersion depth:	39"	39"
Order-No.	0205-411-1	0205-411-2
Immersion depth:	47"	47"
Order-No.	0205-412-1	0205-412-2
Immersion depth:	55"	55"
Order-No.	0205-413-1	0205-413-2


*Max. 760 CPS is with hand nozzle



ME I 6 (Ex)



MD2xL Air motor (Ex)

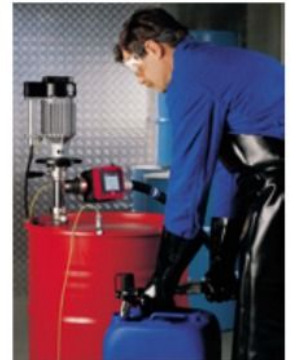

Electric or Air Driven Drum Pump Sets for Thin-bodied Oils and Diesel Fuel

Include:

Motor B36 with 16 ft cord or MD2xL air motor, pump tube ALU 39" sealless, high head impeller, 316 stainless steel shaft, PP Barrel Adaptor, 1" aluminium Nozzle with swivel, 8' PVC Hose, Hose Clamps, Wall Hanger



Type of motor:

Technical Data:

	B36	MD2xL Air motor
Motor:	120 V, 0.85 HP, ODP	1.36 HP, 87 PSI, 53 CFM
Max. Viscosity:	760 CPS	1,000 CPS*
Max. Capacity:	15.9 GPM	15.9 GPM
Max. spec. Gravity:	1.4	2.8
Immersion depth:	39"	39"
Order-No.	0205-301-1	0205-301-2
Immersion depth:	47"	47"
Order-No.	0205-302-1	0205-302-2
Immersion depth:	55"	55"
Order-No.	0205-303-1	0205-303-2

*Max. 760 CPS is with hand nozzle



B36



MD2xL Air motor



Lutz Pumps, Inc.

1160 Beaver Run Road · Norcross, GA 30093-4898 · Phone: (770) 925-1222 or (800) 843-3901 · Fax: (770) 923-0334
E-Mail: info@lutzpumpsamerica.com · www.lutzpumpsamerica.com