

CM004

PP




PVDF



TECHNICAL DATA

Inlet connections	1" f
Outlet connections	1/2" m
Max. Flow rate	3,5 m ³ /h
Max. Delivery head	7,5 mts
Max Viscosity	100 CPS
Max Temperature PP	+65°C
Min. Temperature PP	-5°C
Max Temperature PVDF	+90°C
Min. Temperature PVDF	-10°C

PERFORMANCE

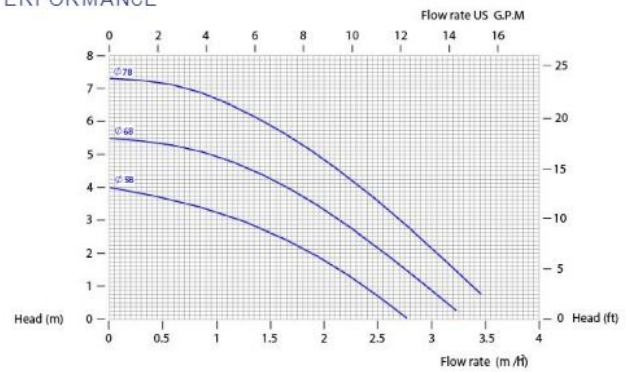

The curves and performance values refer to pumps with free delivery outlet with water at 20°C, and two poles motor 50 Hz


SPECIFIC GRAVITY TABLE

IMPELLER	0,13 Kw
ø 78 mm	up to 1,2
ø 68 mm	up to 1,5
ø 58 mm	up to 1,8

MOTOR SPECIFICATION

SIZE	Kw	RPM
IEC3 56	0,13	2900

DIMENSIONS

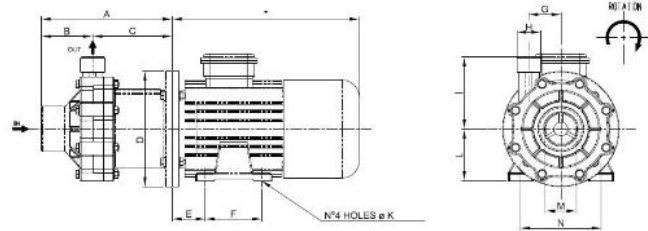

A	B	C	D	E	F	G	H	I	L	M	N	K
114	38,5	75,5	120	36	71	34	1/2"	80	56	1"	90	5,8

*Depend on the manufacturer

COMPOSITION

MODEL	CASING	O RING	SHAFT + BUSHING	IMPELLER	CONNECTIONS	MOTOR	MOTOR POWER
CM004	P = PP K = PVDF	D = EPDM V = VITON	TA = PTFEC + ALLUMINA 99,7%	78= ø 78 mm STD 68= ø 68 mm 58= ø 58 mm	1 = BSP STD 2 = FLANGED 5 = NPT	IE = IEC 3P-H STD X = ATEX - = NO MOTOR	0,13 = 0,13 Kw STD

