

# CM010

PP




PVDF



## TECHNICAL DATA

Inlet connections	1" 1/2 f
Outlet connections	1" m
Max. Flow rate	13 m <sup>3</sup> /h
Max. Delivery head	14 mts
Max Viscosity	200 CPS
Max Temperature PP	+65°C
Min. Temperature PP	-5°C
Max Temperature PVDF	+90°C
Min. Temperature PVDF	-10°C

## PERFORMANCE

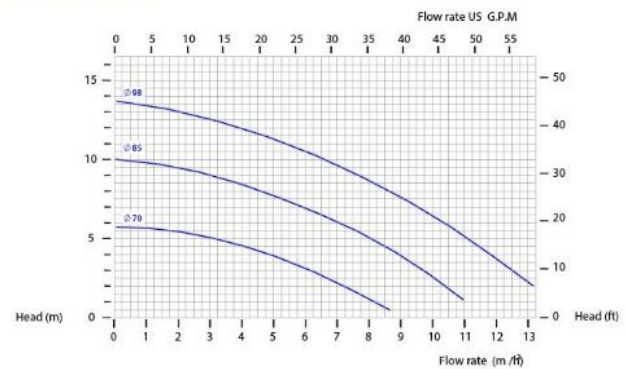

The curves and performance values refer to pumps with free delivery outlet, with water at 20°C, and two poles motor 50 Hz


## SPECIFIC GRAVITY TABLE

IMPELLER	0,55 KW
ø 98 mm	up to 1,1
ø 85 mm	up to 1,6
ø 70 mm	up to 2

## MOTOR SPECIFICATION

SIZE	Kw	RPM
IEC3 71	0,55	2900

## DIMENSIONS

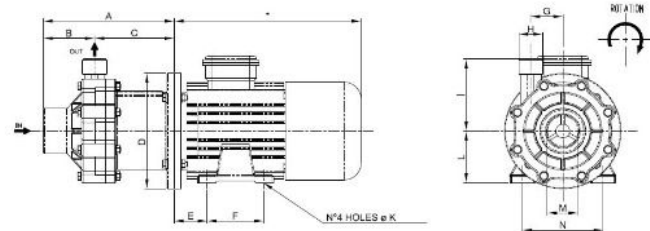

A	B	C	D	E	F	G	H	I	L	M	N	K
---	---	---	---	---	---	---	---	---	---	---	---	---

180 70,8 109,5 160 45 90 44 1" 100 71 1\*1/2 112 7

\*Depend on the manufacturer

## COMPOSITION

MODEL	CASING	O RING	SHAFT + BUSHING	IMPELLER	CONNECTIONS	MOTOR	MOTOR POWER
CM010	P = PP K = PVDF	D = EPDM V = VITON	TA = PTFEC + ALLUMINA 99,7%	98 = ø 98 mm STD 85 = ø 85 mm 70 = ø 70 mm	1 = BSP STD 2 = FLANGED 5 = NPT	IE = IEC 3PH STD X = ATEX - = NO MOTOR	0,55 = 0,55 Kw STD

