




CARATTERISTICHE - SPECIFICATIONS

IN	DIAMETER	∅	1"1/2 BSP
	PRESS.	Min.	-0.2 Bar -3 PSI
		Max.	6 bar 87 PSI
TEMP.	Max.	60° C. 140° F.	
OUT	DIAMETER	∅	1" BSP (CX 1515-1715) 3/4 BSP (CX 1025)
SHAFT		∅	40 mm
OIL		SAE 75W90	4 litri 1.05 U.S.G.
PESO WEIGHT		Kg / lbs	83 / 183

KIT PIEDINI cod. 74.9802.97.3 (optional)
 MOUNTING RAILS KIT p/n 74.9802.97.3 (optional)
 KIT SUPPORTS réf. 74.9802.97.3 (option)
 JUEGO DE PIES cod. 74.9802.97.3 (opción)

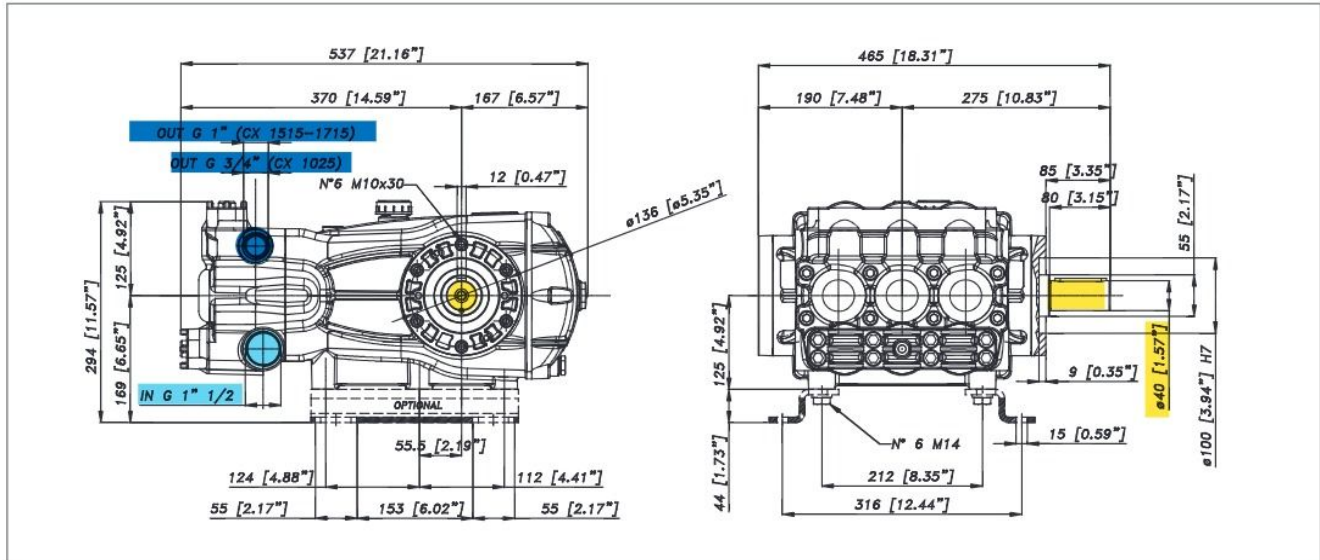

CARATTERISTICHE - FEATURES

PERFORMANCE CHART

MODELLO MODEL CODICE PART NR.	MAX		PRESS		RPM 550				RPM 750				RPM 1000				PIST. PLUNG. Dia. mm	CORSA STROKE mm
	L/min	GPM	Bar	PSI	L/min	GPM	KW	HP	L/min	GPM	KW	HP	L/min	GPM	KW	HP		
CX 1025 74.1023.97.3(*)	98	26.0	170	2465	55	14.6	18.4	24.7	75	19.7	24.9	33.4	98	26.0	32.9	44.1	30	50
			210	3045	55	14.5	22.7	30.4	74	19.6	30.6	41.0	98	25.9	40.4	54.2		
			250	3625	55	14.5	26.9	36.0	74	19.5	36.3	48.6	97	25.8	47.9	64.2		
CX 1515 74.1021.97.3(*)	154	40.7	100	1450	86	22.8	17.0	22.8	117	30.8	22.9	30.7	154	40.7	30.3	40.6	40	44
			125	1813	86	22.7	21.1	28.3	116	30.7	28.5	38.2	153	40.5	37.6	50.5		
			150	2175	86	22.6	25.2	33.8	116	30.5	34.0	45.6	153	40.3	44.9	60.2		
CX 1715 74.1022.97.3(*)	175	46.3	100	1450	98	25.9	19.3	25.9	133	35.0	26.0	34.9	175	46.3	34.4	46.1	40	50
			125	1813	98	25.8	24.0	32.2	132	34.9	32.4	43.4	174	46.0	42.8	57.3		
			150	2175	97	25.7	28.6	38.4	131	34.7	38.7	51.9	173	45.8	51.1	68.5		

(*) Per specificare la versione aggiungere al codice:
L = albero sinistro dia. 40 mm
R = albero destro dia. 40 mm

(*) To specify the version pls. add to the last number:
L = left side shaft dia. 40 mm
R = right side shaft dia. 40 mm

(*) Pour spécifier la version ajouter à la réf.:
L = arbre côté gauche dia. 40 mm
R = arbre côté droit dia. 40 mm

(*) Para especificar la versión añadir a la referencia:
L = cigüeñal a la izquierda dia. 40 mm
R = cigüeñal a la derecha dia. 40 mm