


customized **highest** state
PRECISION **AL** **THE ART**
RB PREMIUM customized
PRECISION

CARATTERISTICHE - SPECIFICATIONS

| | | | |
|-------------|----------|----------------|----------------------|
| IN | DIAMETER | ∅ | 1" BSP |
| | PRESS. | Min. | -0.1 bar - 1.5 PSI |
| | | Max. | 6 bar 87 PSI |
| TEMP. | Max. | 74° C. 165° F. | |
| OUT | DIAMETER | ∅ | 1/2 BSP |
| SHAFT | | ∅ | 1" 3/8 DIN 9611A |
| OIL | | SAE 75W90 | 1.5 litri 0.4 U.S.G. |
| PESO WEIGHT | | Kg / lbs | 22 / 48.5 |




INTELLiseal™



Dx Bz B M O

OPTIONAL

Sx

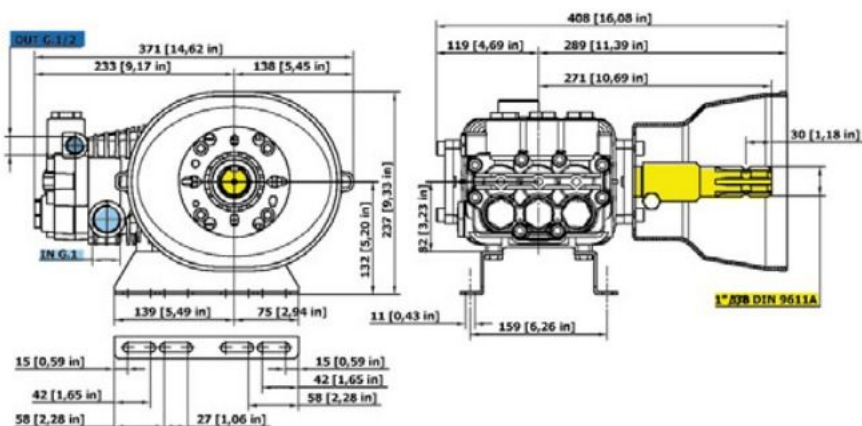

CARATTERISTICHE - FEATURES

PERFORMANCE CHART

| MODELLO MODEL CODICE PART NR. | MAX | | PRESS | | RPM 550 | | | | RPM 750 | | | | RPM 1000 | | | | PIST. PLUNG. Dia. mm | CORSA STROKE mm |
|----------------------------------|-------|-----|-------|------|---------|-----|-----|-----|---------|-----|------|------|----------|-----|------|------|----------------------------|-----------------------|
| | L/min | GPM | Bar | PSI | L/min | GPM | KW | HP | L/min | GPM | KW | HP | L/min | GPM | KW | HP | | |
| RB 1719-P 08.1010.97.A | 30.0 | 7.9 | 150 | 2175 | 16.8 | 4.4 | 5.0 | 6.6 | 22.7 | 6.0 | 6.7 | 9.0 | 30.0 | 7.9 | 8.8 | 11.8 | 25 | 21 |
| | | | 170 | 2465 | 16.7 | 4.4 | 5.6 | 7.5 | 22.6 | 6.0 | 7.5 | 10.1 | 29.8 | 7.9 | 10.0 | 13.3 | | |
| | | | 190 | 2755 | 16.6 | 4.4 | 6.2 | 8.3 | 22.5 | 5.9 | 8.4 | 11.2 | 29.7 | 7.8 | 11.1 | 14.8 | | |
| RB 2019-P 08.1011.97.A | 35.7 | 9.4 | 150 | 2175 | 20.0 | 5.3 | 5.9 | 7.9 | 27.0 | 7.1 | 8.0 | 10.7 | 35.7 | 9.4 | 10.5 | 14.1 | 25 | 25 |
| | | | 170 | 2465 | 19.9 | 5.3 | 6.6 | 8.9 | 26.9 | 7.1 | 9.0 | 12.0 | 35.5 | 9.4 | 11.9 | 15.9 | | |
| | | | 190 | 2755 | 19.8 | 5.2 | 7.4 | 9.9 | 26.8 | 7.1 | 10.0 | 13.4 | 35.3 | 9.3 | 13.2 | 17.7 | | |

highest quality state customized PRECISION RBL PREMIUM

CARATTERISTICHE - SPECIFICATIONS

| | | | |
|-------------|-----------|----------------|----------------------|
| IN | DIAMETER | Ø | 1" BSP |
| | PRESS. | Min. | -0.1 bar - 1.5 PSI |
| | | Max. | 6 bar 87 PSI |
| TEMP. | Max. | 74° C. 165° F. | |
| OUT | DIAMETER | Ø | 1/2 BSP |
| SHAFT | | Ø | 30 mm |
| OIL | SAE 75W90 | | 1.5 litri 0.4 U.S.G. |
| PESO WEIGHT | Kg lbs | | 20.5 / 45.2 |



FLANGIA CON GIUNTO ELASTICO PER MOTORI IDRAULICI (vedi pag. 76)


BRIDE AVEC ACCOUPLEMENT ELASTIQUE POUR MOTEURS HYDRAULIQUES (voir page 76)

BELL HOUSING + FLEXIBLE COUPLING FOR HYDRAULIC MOTORS (see page 76)

BRIDA CON JUNTA ELÁSTICA PARA MOTORES HIDRAULICOS (véase pág. 76)



INTELLIseal™




Dx Bz B O

OPTIONAL

Sx G M F

KIT PIEDINI cod. 08.9829.97.3 (optional)
 MOUNTING RAILS KIT cod. 08.9829.97.3 (optional)
 KIT SUPPORTS cod. 08.9829.97.3 (option)
 JUEGO DE PIES cod. 08.9829.97.3 (opción)

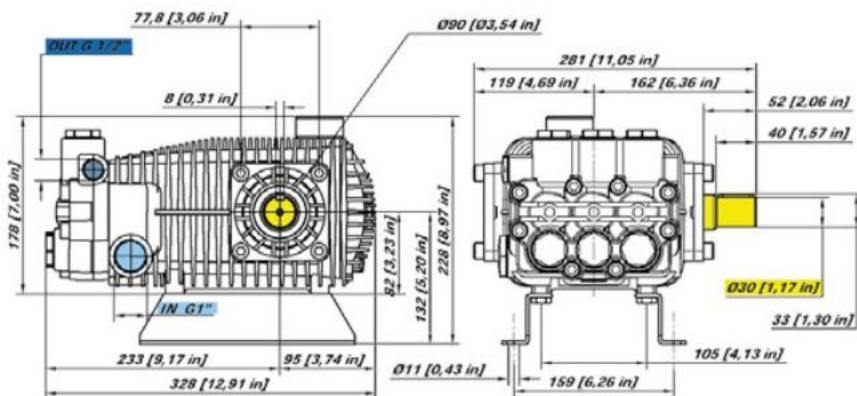

CARATTERISTICHE - FEATURES

PERFORMANCE CHART

| MODELLO MODEL CODICE PART NR. | MAX | | PRESS | | RPM 950 | | | | RPM 1450 | | | | RPM 1725 | | | | PIST. PLUNG. Dia. mm | CORSA STROKE mm |
|----------------------------------|-------|------|-------|------|---------|-----|------|------|----------|------|------|------|--------------|------|------|------|----------------------------|-----------------------|
| | L/min | GPM | Bar | PSI | L/min | GPM | KW | HP | L/min | GPM | KW | HP | L/min | GPM | KW | HP | | |
| RBL 4219-P 08.1042.97.A | 49.0 | 12.9 | 150 | 2175 | 27.5 | 7.3 | 8.1 | 10.9 | 41.6 | 11.0 | 12.3 | 16.4 | 49.0 | 12.9 | 14.4 | 19.4 | 25 | 21 |
| | | | 170 | 2465 | 27.4 | 7.2 | 9.1 | 12.3 | 41.4 | 10.9 | 13.8 | 18.5 | 48.8 | 12.9 | 16.3 | 21.8 | | |
| | | | 190 | 2755 | 27.3 | 7.2 | 10.2 | 13.6 | 41.2 | 10.9 | 15.4 | 20.6 | 48.5 | 12.8 | 18.1 | 24.3 | | |
| RBL 5019-P 08.1004.97.A | 50.0 | 13.2 | 150 | 2175 | 33.1 | 8.7 | 9.7 | 13.1 | 50.0 | 13.2 | 14.7 | 19.7 | N.D. N.A. | 25 | 25 | | | |
| | | | 170 | 2465 | 32.9 | 8.7 | 11.0 | 14.7 | 49.7 | 13.1 | 16.6 | 22.3 | | | | | | |
| | | | 190 | 2755 | 32.7 | 8.6 | 12.2 | 16.4 | 49.5 | 13.1 | 18.5 | 24.8 | | | | | | |

RBS

NEW

ART

CARATTERISTICHE - SPECIFICATIONS

| | | | |
|-------------|-----------|----------------|----------------------|
| IN | DIAMETER | ∅ | 1" BSP |
| | PRESS. | Min. | -0.1 bar - 1.5 PSI |
| | | Max. | 6 bar 87 PSI |
| TEMP. | Max. | 74° C. 165° F. | |
| OUT | DIAMETER | ∅ | 3/8 BSP |
| SHAFT | | ∅ | 30 mm |
| OIL | SAE 75W90 | | 1.5 litri 0.4 U.S.G. |
| PESO WEIGHT | Kg/lbs | | 20.5 / 45.2 |



FLANGIA CON GIUNTO ELASTICO PER MOTORI IDRAULICI (vedi pag. 76)

BELL HOUSING + FLEXIBLE COUPLING FOR HYDRAULIC MOTORS (see page 76)

BRIDE AVEC ACCOUPLEMENT ELASTIQUE POUR MOTEURS HYDRAULIQUES (voir page 76)

BRIDA CON JUNTA ELÁSTICA PARA MOTORES HIDRAULICOS (véase pág. 76)




INTELLISEAL™



OPTIONAL

KIT PIEDINI cod. 08.9829.97.3 (optional)
 MOUNTING RAILS KIT cod. 08.9829.97.3 (optional)
 KIT SUPPORTS cod. 08.9829.97.3 (option)
 JUEGO DE PIES cod. 08.9829.97.3 (opción)

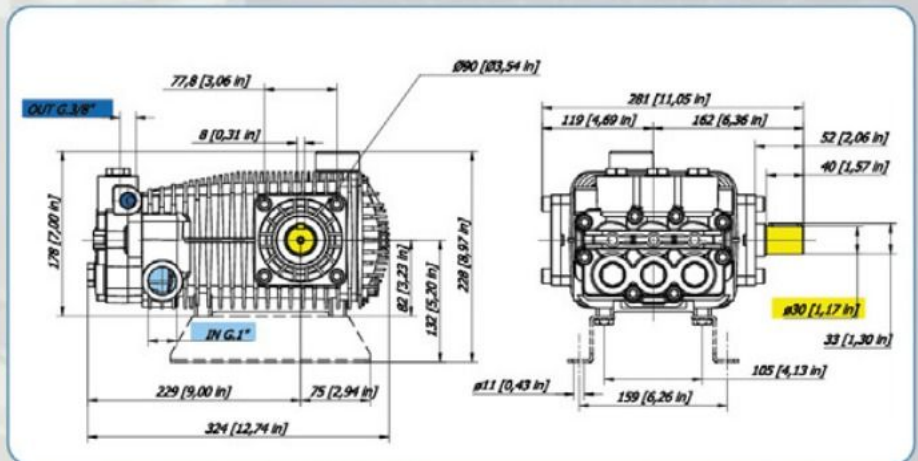

CARATTERISTICHE - FEATURES

PERFORMANCE CHART

| MODELLO MODEL CODICE PART NR. | MAX | | PRESS | | RPM 700 | | | | RPM 850 | | | | RPM 1000 | | | | PIST. PLUNG. Dia. mm | CORSA STROKE mm |
|----------------------------------|-------|-----|-------|------|---------|-----|------|------|---------|-----|------|------|----------|-----|------|------|----------------------------|-----------------------|
| | L/min | GPM | Bar | PSI | L/min | GPM | KW | HP | L/min | GPM | KW | HP | L/min | GPM | KW | HP | | |
| RBS 2335 08.1087.97.3 | 23.0 | 6.1 | 250 | 3625 | 16.4 | 4.3 | 8.1 | 10.8 | 19.7 | 5.2 | 9.7 | 13.0 | 23.0 | 6.1 | 11.3 | 15.1 | 22 | 21 |
| | | | 300 | 4350 | 16.3 | 4.3 | 9.6 | 12.9 | 19.6 | 5.2 | 11.6 | 15.5 | 22.9 | 6.0 | 13.5 | 18.1 | | |
| | | | 350 | 5075 | 16.2 | 4.3 | 11.2 | 15.0 | 19.5 | 5.2 | 13.4 | 18.0 | 22.7 | 6.0 | 15.6 | 21.0 | | |
| RBS 2735 08.1088.97.3 | 27.3 | 7.2 | 250 | 3625 | 19.5 | 5.2 | 9.6 | 12.9 | 23.5 | 6.2 | 11.5 | 15.5 | 27.3 | 7.2 | 13.4 | 18.0 | 22 | 25 |
| | | | 300 | 4350 | 19.4 | 5.1 | 11.4 | 15.3 | 23.4 | 6.2 | 13.8 | 18.5 | 27.2 | 7.2 | 16.0 | 21.5 | | |
| | | | 350 | 5075 | 19.3 | 5.1 | 13.3 | 17.8 | 23.2 | 6.1 | 16.0 | 21.4 | 27.1 | 7.2 | 18.6 | 24.9 | | |