

highest quality state of the art CUSTOMIZED PRECISION WBG

CARATTERISTICHE - SPECIFICATIONS

IN	DIAMETER	∅	3/8 BSP
	PRESS.	Min.	1 bar 15 PSI
		Max.	6 bar 87 PSI
TEMP.	Max.	60° C. 140° F.	
OUT	DIAMETER	∅	3/8 BSP
SHAFT		∅	HOLLOW 3/4"
OIL		SAE 75W 90	0.5 litri 0.13 U.S.G.
PESO WEIGHT		Kg / lbs	6 / 13.2




M SAE J609 -3/4"



OPTIONAL

R
Dx
T
B

Sx
Bz

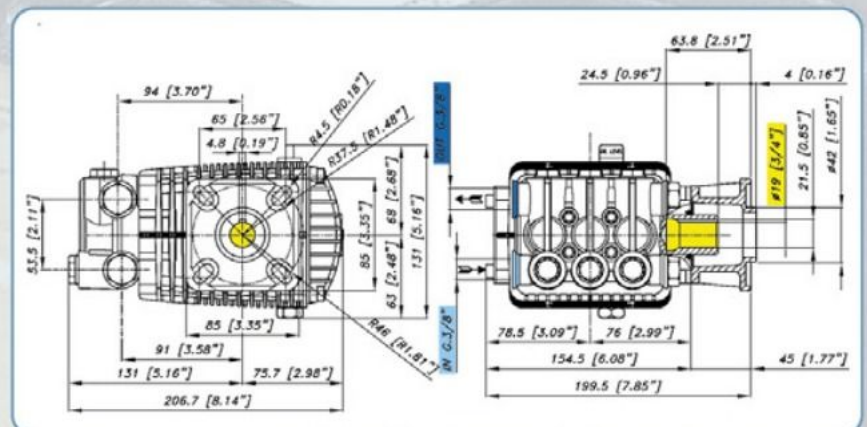

WBG 3450 rpm

CARATTERISTICHE - FEATURES

PERFORMANCE CHART

CODICE PART NR.	MODELLO MODEL	PRESS MAX / MAX PRESSURE		PORTATA / FLOW		POTENZA / POWER			PIST. PLUNG. Dia. mm	CORSA STROKE mm
		Bar	PSI	L/min	GPM	KW	HP	HP engine		
02.6150.97.3	WBG 1521	105	1500	8.0	2.1	1.6	2.1	3.5	15	4.8
02.6151.97.3	WBG 2021	140	2000	8.0	2.1	2.1	2.8	4		
02.6152.97.3	WBG 2521	175	2500	8.0	2.1	2.6	3.5	5		
02.6153.97.3	WBG 1625	110	1600	9.5	2.5	2.1	2.8	4	15	6
02.6154.97.3	WBG 2025	140	2000	9.5	2.5	2.6	3.5	5		
02.6155.97.3	WBG 2525	175	2500	9.5	2.5	3.2	4.3	6		
02.6156.97.3	WBG 1630	110	1600	11.4	3.0	2.5	3.4	5	15	7.2
02.6157.97.3	WBG 2030	140	2000	11.4	3.0	3.1	4.2	5.5		
02.6158.97.3	WBG 2530	175	2500	11.4	3.0	3.8	5.1	6.5		
02.6159.97.3	WBG 1535	105	1500	13.2	3.5	2.6	3.5	5	15	8
02.6160.97.3	WBG 2035	140	2000	13.2	3.5	3.5	4.7	6.5		
02.6161.97.3	WBG 2535	175	2500	13.2	3.5	4.3	5.8	6.5		

highest state PRECISIONALITY OF THE ART highest customized WBG-W QUALITY PRECISION

CARATTERISTICHE - SPECIFICATIONS

IN	DIAMETER	\varnothing	3/8 BSP
	PRESS.	Min.	1 bar 15 PSI
		Max.	6 bar 87 PSI
TEMP.	Max.	60° C. 140° F.	
OUT	DIAMETER	\varnothing	3/8 BSP
SHAFT		\varnothing	HOLLOW 3/4"
OIL		SAE 75W 90	0.5 litri 0.13 U.S.G.
PESO WEIGHT		Kg / lbs	7/ 15.4




M SAE J609 -3/4"



OPTIONAL



Con valvola depressurizzatrice incorporata e eiettore detergente regolabile
 With unloader valve and adjustable injector built-in
 Avec régulateur de pression by-pass et éjecteur réglable incorporés
 Con válvula de regulación de presión y eeyctor regulable incorporados

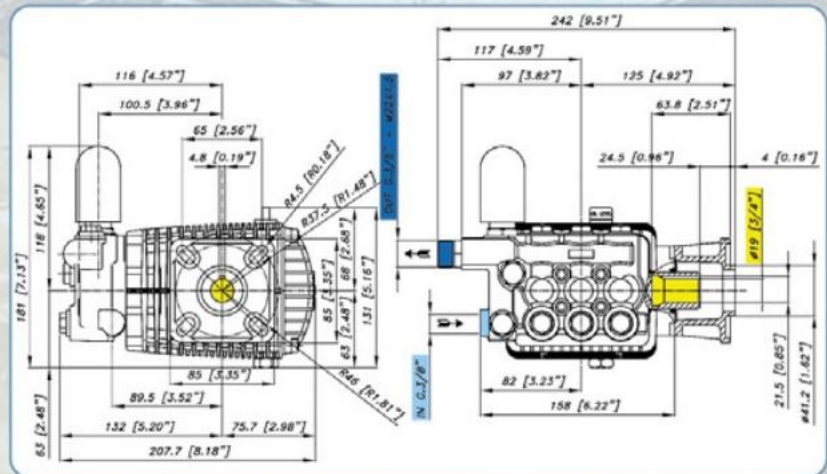

WBG-W 3450 rpm

CARATTERISTICHE - FEATURES

PERFORMANCE CHART

CODICE PART NR.	MODELLO MODEL	PRESS MAX / MAX PRESSURE		PORTATA / FLOW		POTENZA / POWER			PIST. PLUNG. Dia. mm	CORSA STROKE mm
		Bar	PSI	L/min	GPM	KW	HP	HP engine		
02.6180.97.3	WBG 1521-W	105	1500	8.0	2.1	1.6	2.1	3.5	15	4.8
02.6181.97.3	WBG 2021-W	140	2000	8.0	2.1	2.1	2.8	4		
02.6182.97.3	WBG 2521-W	175	2500	8.0	2.1	2.6	3.5	5		
02.6183.97.3	WBG 1625-W	110	1600	9.5	2.5	2.1	2.8	4	15	6
02.6184.97.3	WBG 2025-W	140	2000	9.5	2.5	2.6	3.5	5		
02.6185.97.3	WBG 2525-W	175	2500	9.5	2.5	3.2	4.3	6		
02.6186.97.3	WBG 1630-W	110	1600	11.4	3.0	2.5	3.4	5	15	7.2
02.6187.97.3	WBG 2030-W	140	2000	11.4	3.0	3.1	4.2	5.5		
02.6188.97.3	WBG 2530-W	175	2500	11.4	3.0	3.8	5.1	6.5		
02.6189.97.3	WBG 1535-W	105	1500	13.2	3.5	2.6	3.5	5	15	8
02.6190.97.3	WBG 2035-W	140	2000	13.2	3.5	3.5	4.7	6.5		
02.6191.97.3	WBG 2535-W	175	2500	13.2	3.5	4.3	5.8	6.5		