

highest quality customized precision

WHY 1520

POMPA PER MOTORE IDRAULICO - PUMP FOR HYDRAULIC MOTOR
 POMPE POUR MOTEUR HYDRAULIQUE - BOMBA PARA MOTOR HIDRÁULICO

CARATTERISTICHE - SPECIFICATIONS


		WHY	
IN	DIAMETER	\varnothing	3/8 BSP (PUMP) - 1/2 BSP (VALVE)
	PRESS.	Min.	1 bar 15 PSI
		Max.	6 bar 87 PSI
TEMP.	Max.	60° C. 140° F.	
OUT	DIAMETER	\varnothing	3/8 BSP
SHAFT		\varnothing	HOLLOW 14X17 DIN 5482
OIL		SAE 75W 90	0.5 Litri 0.13 U.S.G.
PESO WEIGHT		Kg	5.8/12.7 (PUMP)
		lbs	11.8/26 (MOTOR PUMP)
PISTONE PLUNG.	DIAMETER	mm	18
CORSA STROKE		mm	12.4

KIT ACCESSORI - ACCESSORIES KIT - KIT ACCESSOIRES - KIT ACCESORIOS (OPTIONAL)

02.6198.97.A

Lancia- Pistola- Ugello - Filtro- Tubo di mandata 5/16" - Lance- Gun- Nozzle - Filter- High pressure hose 5/16"
 Lance- Pistolet - Buse - Filtre- Flexible H.P. 5/16" - Lanza- Pistola- Boquilla- Filtro- Manguera de alta presión 5/16"

WHY 1520

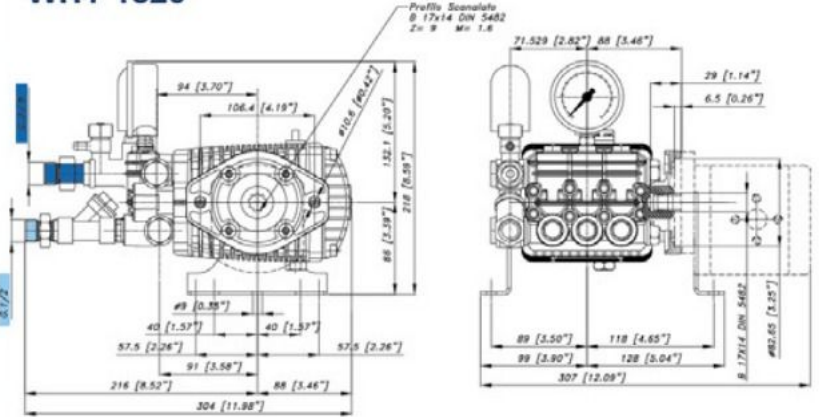

02.6195.97.3
POMPA PER MOTORE IDRAULICO
 (Manometro e kit piedini inclusi)
PUMP FOR HYDRAULIC MOTOR
 (Pressure gauge and mounting rail kit included)
POMPE POUR MOTEUR HYDRAULIQUE
 (Equipement fourni: manomètre et kit supports)
BOMBA PARA MOTOR HIDRÁULICO
 (Manómetro y juego de pies incluidos)

02.6196.97.3
POMPA CON MOTORE IDRAULICO
HYDRAULIC MOTOR PUMP
POMPE AVEC MOTEUR HYDRAULIQUE
BOMBA CON MOTOR HIDRÁULICO



CARATTERISTICHE - FEATURES

PERFORMANCE CHART

CODICE PART NR.	MAX		PRESS		RPM 950			RPM 1450			RPM 1725			Oil Pressure (hydraulic motor)				
	L/min	GPM	Bar	PSI	L/min	GPM	KW	HP	L/min	GPM	KW	HP	L/min	GPM	Bar	PSI		
WHY 1520			150	2175	8.7	2.3	2.6	3.4	13.0	3.4	3.8	5.1	15.0	4.0	4.4	5.9		
02.6195.97.3	15.0	4.0	180	2610	8.7	2.3	3.1	4.1	12.9	3.4	4.6	6.1	14.9	3.9	5.3	7.1	50	725
02.6196.97.3			200	2900	8.6	2.3	3.4	4.5	12.9	3.4	5.1	6.8	14.9	3.9	5.8	7.8	60	870
					22	5.8			32	8.4			38	10			80	1160

PORTATA OLIO MOTORE IDRAULICO
 HYDRAULIC MOTOR OIL FLOW