


# Model EVMU / EVMUG / EVMUL

#### **Features**

- Standard NEMA motors
- . Integral thrust bearing on 5 HP and larger pumps to handle axial thrust loads
- Air vent in casing cover allows proper venting preventing air entrapment and dry run
- Liner ring is a self-aligning, floating design constructed to prevent swelling at high temperatures
- Tungsten carbide lower pump bearings and sleeves are standard construction for all services, providing maximum operating life
- Direct drive pump and motor shafts are keyed for positive, reliable power transmission with no adjustments necessary
- "Flexible" floating outer casing allows for thermal expansion in hot water applications, preventing deformation due to pressure fluctuations
- Anti-erosion measures a dish-shaped insert is fitted to the intermediate casing designed to promote smooth flow and prevent high velocity areas that accelerate erosion
- Square-edge six spline shaft (EVMU 3-18) or twelve spline shaft (EVMU 32-64) provides positive location and drive of impellers eliminating wear
- Dimensions & flanges installation is to market accepted dimensions for easy upgrade of existing installations
- Mechanical seal Silicon/Carbon/Viton mechanical shaft seal; cartridge seal standard on Models 32, 45, and 64
- Positive Sealing 0-rings between intermediate casings provide positive sealing

### EVMU, EVMUG, EVMUL selection chart

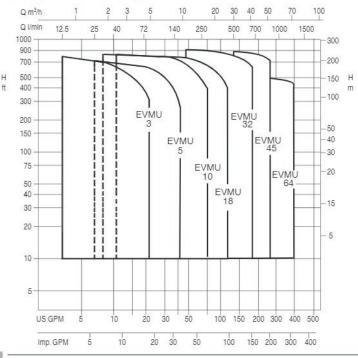

## **Applications**

- · Water supply systems
- · Reverse osmosis
- Water Boosting
- · Washing systems
- · Fire fighting
- Water treatment
- Plants
- Boiler feed
- · Jockey pump services
- · Hot & cold water
- Circulation
- Irrigation
- Sprinkler systems
- Filtration
- Heat exchangers

#### **Model Description**

Model

Construction

**EVMU 3-18** 

304 SS

**EVMUG 32-64** 

304SS/Cast Iron

**EVMUL 3-64** 

316SS



\*Note: NSF/ANSI 61 Annex G listed models: EVMU3-18, EVMUL all models 3-64



© 2009 EBARA International Corporation, All rights reserved.

1651 Cedar Line Drive , Rock Hill, SC 29730 , telephone: (803) 327-5005 , fax: (803) 327-5097 www.pumpsebara.com

EFHEVMUGL 0312