

# XR

### Application

- For water supply from wells or reservoirs.
- For domestic use, for civil and industrial applications.
- For garden use and irrigation.

### Operating conditions

- Maximum fluid temperature up to +35 °C
- Maximum sand content: 0.25%
- Maximum immersion: 80 m
- Minimum well diameter: 3"


### Motor and Pump

- Rewindable motor or full obfuscated screen motor
- **Three-phase:** 380V–415V/50Hz
- **Single-phase:** 220V–240V/50Hz
- Pumps are designed by casing stressed
- Curve tolerance according to ISO 9906




| Components            | Material                                      |
|-----------------------|---|
| Pump external casing  | ASD 304 SS                                    |
| Delivery casing       | Cast-Cu ASTM200                               |
| Cursor System         | Cast-Cu ASTM200                               |
| Diffuser              | PC  |
| Impeller              | PCM   |
| Shaft                 | 1: AISI 316 SS 2: AISI 304 SS                 |
| Shaft coupling        | 1: AISI 316 SS 2: AISI 304 SS                 |
| Wear ring             | AISI 304 SS                                   |
| Motor external casing | AISI 304 SS                                   |
| Tip cover             | Cast-Cu ASTM200                               |
| Bottom support        | AISI 304 SS                                   |
| Mechanical seal       | Special seal for deep well (carbon-SiC/TiC)   |
| Shaft                 | AISI 304 SS-C1545                             |
| Bearing               | NSK   |
| Seal lubricant oil    | Oil for food machinery and pharmaceutical use |

**3XR(m)1.5/10-0.25**




# 3XR 1.5

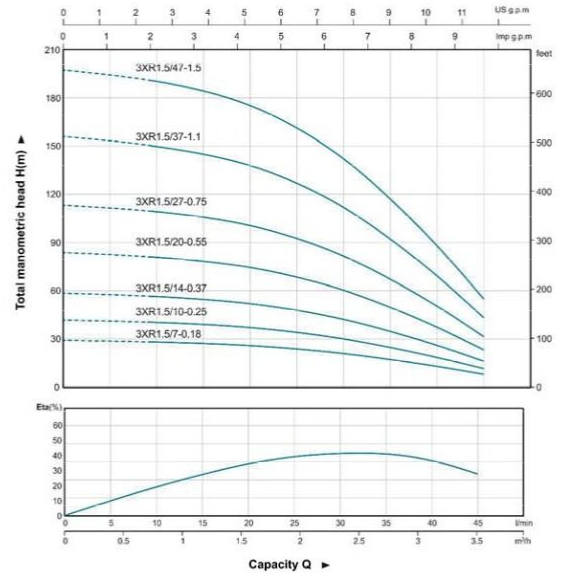


### Technical Data

| Model           | P <sub>2</sub>  | Delivery |      |     |      |     |     |     |     |     |     |     |     |     |     |  |  |
|-----------------|-----------------|----------|------|-----|------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|--|--|
|                 |                 | Q        | 0    | 0.3 | 0.6  | 0.9 | 1.2 | 1.5 | 1.8 | 2.1 | 2.4 | 2.7 | 3.0 | 3.3 | 3.6 |  |  |
| 1-<br>220V/240V | 3-<br>380V/415V | KW       | HP   | Q   | H(m) |     |     |     |     |     |     |     |     |     |     |  |  |
| 3XRm1.5/7-0.18  | 3XR1.5/7-0.18   | 0.18     | 0.25 | 29  | 29   | 29  | 28  | 27  | 26  | 24  | 21  | 17  | 13  | 8   |     |  |  |
| 3XRm1.5/10-0.25 | 3XR1.5/10-0.25  | 0.25     | 0.33 | 42  | 41   | 40  | 39  | 37  | 34  | 30  | 25  | 19  | 12  |     |     |  |  |
| 3XRm1.5/14-0.37 | 3XR1.5/14-0.37  | 0.37     | 0.5  | 59  | 58   | 57  | 55  | 52  | 48  | 42  | 35  | 26  | 16  |     |     |  |  |
| 3XRm1.5/20-0.55 | 3XR1.5/20-0.55  | 0.55     | 0.75 | 84  | 83   | 81  | 78  | 74  | 69  | 60  | 50  | 37  | 23  |     |     |  |  |
| 3XRm1.5/27-0.75 | 3XR1.5/27-0.75  | 0.75     | 1    | 113 | 111  | 109 | 106 | 101 | 92  | 82  | 67  | 51  | 32  |     |     |  |  |
| 3XRm1.5/37-1.1  | 3XR1.5/37-1.1   | 1.1      | 1.5  | 155 | 153  | 150 | 145 | 138 | 127 | 112 | 92  | 69  | 43  |     |     |  |  |
| 3XRm1.5/47-1.5  | 3XR1.5/47-1.5   | 1.5      | 2    | 197 | 194  | 190 | 184 | 175 | 161 | 142 | 117 | 88  | 55  |     |     |  |  |

### 3XR2.5

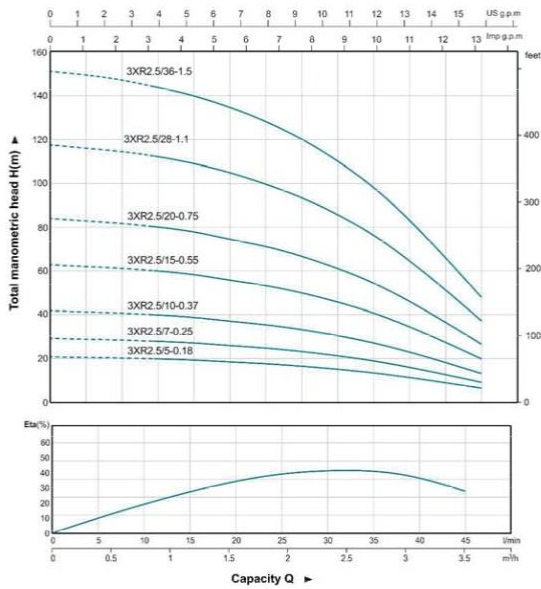

### 3.5XR 2.5

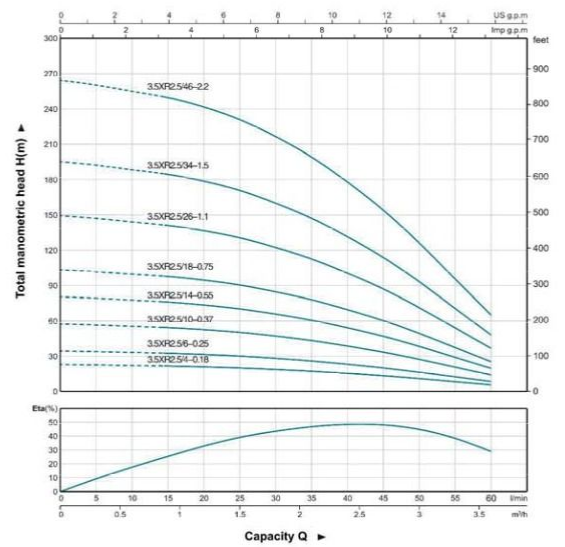


#### Technical Data

| Model           | P <sub>2</sub> |               | Delivery |      |       |      |     |     |     |     |     |     |     |     |     |     |     |     |  |  |
|-----------------|----------------|---------------|----------|------|-------|------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|--|--|
|                 | 1 - 220V/240V  | 3 - 380V/415V | KW       | HP   | Q     | m³/h |     |     |     |     |     |     |     |     |     |     |     |     |  |  |
|                 |                |               |          |      | l/min | 0    | 0.3 | 0.6 | 0.9 | 1.2 | 1.5 | 1.8 | 2.1 | 2.4 | 2.7 | 3.0 | 3.3 | 3.6 |  |  |
| 3XRm2.5/5-0.18  | 3XR2.5/5-0.18  | 0.18          | 0.25     | H(m) | 21    | 21   | 20  | 20  | 19  | 19  | 18  | 17  | 15  | 14  | 12  | 9   | 7   |     |  |  |
| 3XRm2.5/7-0.25  | 3XR2.5/7-0.25  | 0.25          | 0.33     |      | 29    | 29   | 29  | 28  | 27  | 26  | 25  | 23  | 21  | 19  | 16  | 13  | 9   |     |  |  |
| 3XRm2.5/10-0.37 | 3XR2.5/10-0.37 | 0.37          | 0.5      |      | 42    | 41   | 41  | 40  | 39  | 37  | 36  | 33  | 31  | 27  | 23  | 18  | 13  |     |  |  |
| 3XRm2.5/15-0.55 | 3XR2.5/15-0.55 | 0.55          | 0.75     |      | 63    | 62   | 61  | 60  | 58  | 56  | 53  | 50  | 46  | 41  | 35  | 27  | 20  |     |  |  |
| 3XRm2.5/20-0.75 | 3XR2.5/20-0.75 | 0.75          | 1        |      | 84    | 83   | 82  | 80  | 78  | 74  | 71  | 67  | 61  | 54  | 46  | 37  | 27  |     |  |  |
| 3XRm2.5/28-1.1  | 3XR2.5/28-1.1  | 1.1           | 1.5      |      | 117   | 116  | 114 | 112 | 109 | 104 | 100 | 93  | 86  | 76  | 65  | 51  | 37  |     |  |  |
| 3XRm2.5/36-1.5  | 3XR2.5/36-1.5  | 1.5           | 2        |      | 151   | 149  | 147 | 144 | 140 | 134 | 128 | 120 | 110 | 98  | 83  | 66  | 48  |     |  |  |

#### Technical Data

| Model             | P <sub>2</sub>   |               | Delivery |      |       |      |     |     |     |     |     |     |     |     |     |     |     |     |  |  |
|-------------------|------------------|---------------|----------|------|-------|------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|--|--|
|                   | 1 - 220V/240V    | 3 - 380V/415V | KW       | HP   | Q     | m³/h |     |     |     |     |     |     |     |     |     |     |     |     |  |  |
|                   |                  |               |          |      | l/min | 0    | 0.3 | 0.6 | 0.9 | 1.2 | 1.5 | 1.8 | 2.1 | 2.4 | 2.7 | 3.0 | 3.3 | 3.6 |  |  |
| 3.5XRm2.5/4-0.18  | 3.5XR2.5/4-0.18  | 0.18          | 0.25     | H(m) | 23    | 22   | 22  | 21  | 21  | 20  | 19  | 17  | 15  | 13  | 11  | 8   | 6   |     |  |  |
| 3.5XRm2.5/6-0.25  | 3.5XR2.5/6-0.25  | 0.25          | 0.33     |      | 34    | 34   | 33  | 32  | 31  | 30  | 28  | 26  | 23  | 20  | 16  | 12  | 8   |     |  |  |
| 3.5XRm2.5/10-0.37 | 3.5XR2.5/10-0.37 | 0.37          | 0.5      |      | 57    | 56   | 55  | 54  | 52  | 50  | 47  | 43  | 38  | 33  | 27  | 21  | 14  |     |  |  |
| 3.5XRm2.5/14-0.55 | 3.5XR2.5/14-0.55 | 0.55          | 0.75     |      | 80    | 79   | 77  | 75  | 73  | 70  | 65  | 60  | 54  | 46  | 38  | 29  | 19  |     |  |  |
| 3.5XRm2.5/18-0.75 | 3.5XR2.5/18-0.75 | 0.75          | 1        |      | 103   | 101  | 99  | 97  | 94  | 90  | 84  | 77  | 69  | 59  | 49  | 37  | 25  |     |  |  |
| 3.5XRm2.5/26-1.1  | 3.5XR2.5/26-1.1  | 1.1           | 1.5      |      | 148   | 146  | 142 | 140 | 135 | 129 | 121 | 111 | 99  | 86  | 71  | 54  | 36  |     |  |  |
| 3.5XRm2.5/34-1.5  | 3.5XR2.5/34-1.5  | 1.5           | 2        |      | 194   | 191  | 186 | 183 | 177 | 169 | 158 | 146 | 130 | 112 | 92  | 70  | 47  |     |  |  |
| 3.5XR2.5/46-2.2   |                  | 2.2           | 3        |      | 262   | 258  | 252 | 247 | 239 | 229 | 214 | 197 | 176 | 152 | 125 | 95  | 64  |     |  |  |


## 4XR 2

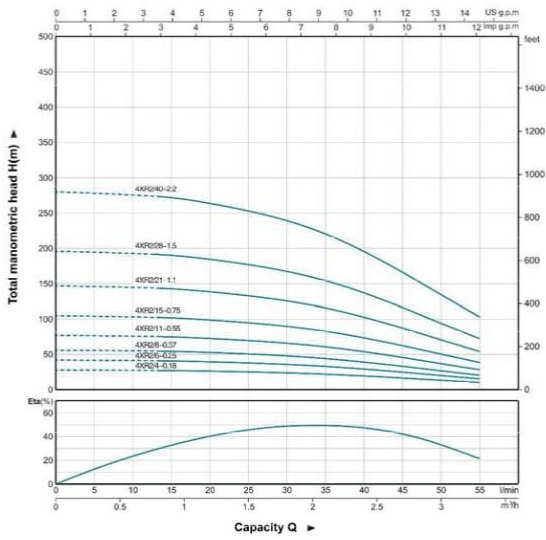

### Technical Data

| Model        | P <sub>2</sub> |               | Delivery |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
|--------------|----------------|---------------|----------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
|              | 1 - 220V/240V  | 3 - 380V/415V | KW       | HP  | Q   | 0   | 0.3 | 0.6 | 0.9 | 1.2 | 1.5 | 1.8 | 2.1 | 2.4 | 2.7 | 3.0 | 3.3 |
| 4XR2/4-0.18  | 4XR2/4-0.18    | 0.18          | 0.25     | 28  | 28  | 28  | 27  | 26  | 25  | 24  | 22  | 20  | 17  | 13  | 10  |     |     |
| 4XR2/6-0.25  | 4XR2/6-0.25    | 0.25          | 0.33     | 42  | 42  | 41  | 41  | 40  | 38  | 36  | 33  | 29  | 25  | 20  | 15  |     |     |
| 4XR2/8-0.37  | 4XR2/8-0.37    | 0.37          | 0.5      | 56  | 56  | 55  | 54  | 53  | 51  | 48  | 44  | 39  | 33  | 27  | 21  |     |     |
| 4XR2/11-0.55 | 4XR2/11-0.55   | 0.55          | 0.75     | 77  | 76  | 76  | 75  | 73  | 70  | 66  | 61  | 54  | 46  | 37  | 28  |     |     |
| 4XR2/15-0.75 | 4XR2/15-0.75   | 0.75          | 1        | 105 | 104 | 103 | 102 | 99  | 95  | 90  | 83  | 73  | 62  | 50  | 39  |     |     |
| 4XR2/21-1.1  | 4XR2/21-1.1    | 1.1           | 1.5      | 147 | 146 | 145 | 143 | 138 | 133 | 126 | 116 | 103 | 87  | 71  | 54  |     |     |
| 4XR2/28-1.5  | 4XR2/28-1.5    | 1.5           | 2        | 196 | 195 | 193 | 190 | 185 | 177 | 168 | 154 | 137 | 116 | 94  | 72  |     |     |
| -            | 4XR2/46-2.2    | 2.2           | 3        | 280 | 278 | 276 | 272 | 264 | 253 | 239 | 221 | 198 | 166 | 134 | 103 |     |     |


## 4XR 3

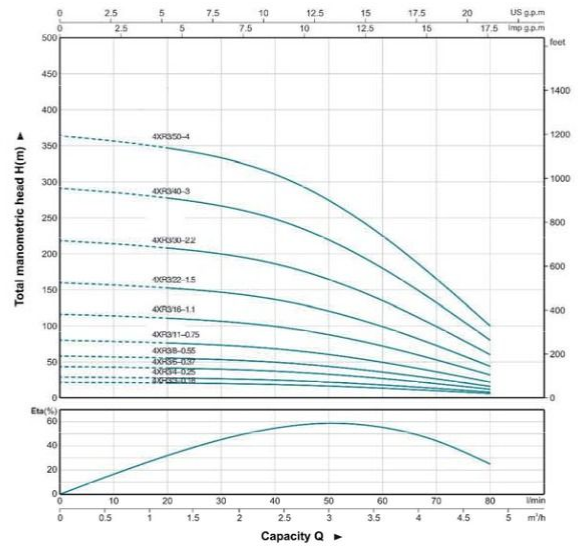

### Technical Data

| Model        | P <sub>2</sub> |               | Delivery |     |     |     |     |     |     |     |     |     |     |     |  |
|--------------|----------------|---------------|----------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|--|
|              | 1 - 220V/240V  | 3 - 380V/415V | KW       | HP  | Q   | 0   | 0.6 | 1.2 | 1.8 | 2.4 | 3.0 | 3.6 | 4.2 | 4.8 |  |
| 4XR3/3-0.18  | 4XR3/3-0.18    | 0.18          | 0.25     | 22  | 21  | 21  | 20  | 19  | 16  | 13  | 10  | 6   |     |     |  |
| 4XR3/4-0.25  | 4XR3/4-0.25    | 0.25          | 0.33     | 29  | 29  | 28  | 27  | 25  | 22  | 18  | 13  | 8   |     |     |  |
| 4XR3/6-0.37  | 4XR3/6-0.37    | 0.37          | 0.5      | 44  | 43  | 42  | 40  | 37  | 33  | 27  | 20  | 12  |     |     |  |
| 4XR3/8-0.55  | 4XR3/8-0.55    | 0.55          | 0.75     | 58  | 57  | 55  | 53  | 50  | 44  | 36  | 26  | 16  |     |     |  |
| 4XR3/11-0.75 | 4XR3/11-0.75   | 0.75          | 1        | 80  | 78  | 76  | 73  | 68  | 60  | 49  | 36  | 22  |     |     |  |
| 4XR3/16-1.1  | 4XR3/16-1.1    | 1.1           | 1.5      | 116 | 114 | 111 | 107 | 99  | 88  | 72  | 53  | 32  |     |     |  |
| 4XR3/22-1.5  | 4XR3/22-1.5    | 1.5           | 2        | 160 | 157 | 153 | 147 | 137 | 121 | 99  | 73  | 44  |     |     |  |
| 4XR3/30-2.2  | 4XR3/30-2.2    | 2.2           | 3        | 218 | 214 | 208 | 200 | 186 | 165 | 135 | 99  | 60  |     |     |  |
| -            | 4XR3/40-3      | 3             | 4        | 291 | 285 | 277 | 266 | 248 | 219 | 180 | 132 | 80  |     |     |  |
| -            | 4XR3/50-4      | 4             | 5.5      | 364 | 356 | 347 | 333 | 310 | 274 | 225 | 165 | 100 |     |     |  |


## 4XR 4

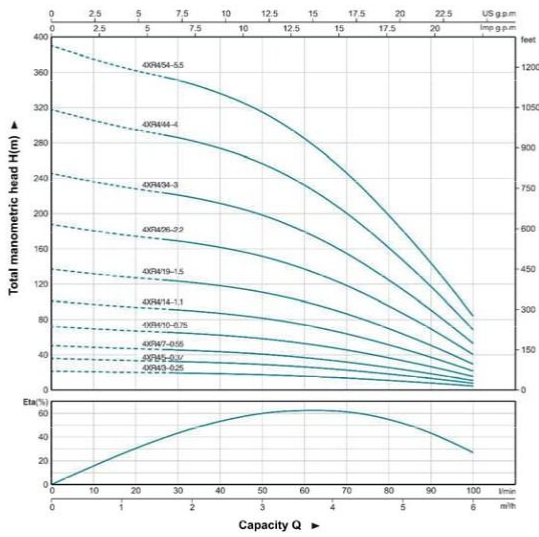

### Technical Data

| Model        | P <sub>2</sub> |               | Delivery |      |     |     |     |     |     |     |     |     |     |     |     |     |  |  |
|--------------|----------------|---------------|----------|------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|--|--|
|              | 1 - 220V/240V  | 3 - 380V/415V | KW       | HP   | Q   | 0   | 0.6 | 1.2 | 1.8 | 2.4 | 3.0 | 3.6 | 4.2 | 4.8 | 5.4 | 6.0 |  |  |
| 4XRm3-0.25   | 4XR4/3-0.25    | 0.25          | 0.33     | H(m) | 22  | 21  | 20  | 19  | 19  | 17  | 16  | 14  | 11  | 8   | 5   |     |  |  |
| 4XRm4/5-0.37 | 4XR4/5-0.37    | 0.37          | 0.5      |      | 36  | 35  | 34  | 32  | 31  | 29  | 26  | 23  | 18  | 13  | 8   |     |  |  |
| 4XRm7-0.55   | 4XR4/7-0.55    | 0.55          | 0.75     |      | 51  | 49  | 47  | 45  | 44  | 41  | 37  | 32  | 26  | 19  | 11  |     |  |  |
| 4XRm10-0.75  | 4XR4/10-0.75   | 0.75          | 1        |      | 72  | 69  | 67  | 65  | 62  | 58  | 53  | 46  | 37  | 27  | 16  |     |  |  |
| 4XRm14-1.1   | 4XR4/14-1.1    | 1.1           | 1.5      |      | 101 | 97  | 94  | 91  | 87  | 82  | 74  | 64  | 51  | 37  | 22  |     |  |  |
| 4XRm19-1.5   | 4XR4/19-1.5    | 1.5           | 2        |      | 137 | 132 | 127 | 124 | 118 | 111 | 100 | 87  | 70  | 51  | 30  |     |  |  |
| 4XRm26-2.2   | 4XR4/26-2.2    | 2.2           | 3        |      | 188 | 181 | 174 | 169 | 162 | 152 | 137 | 118 | 95  | 69  | 40  |     |  |  |
| -            | 4XR4/34-3      | 3             | 4        |      | 246 | 236 | 228 | 221 | 212 | 198 | 179 | 155 | 125 | 91  | 53  |     |  |  |
| -            | 4XR4/44-4      | 4             | 5.5      |      | 318 | 306 | 295 | 286 | 274 | 257 | 232 | 200 | 161 | 117 | 68  |     |  |  |
| -            | 4XR4/54-5.5    | 5.5           | 7.5      |      | 390 | 375 | 362 | 351 | 336 | 315 | 285 | 246 | 198 | 144 | 84  |     |  |  |


## 4XR 6

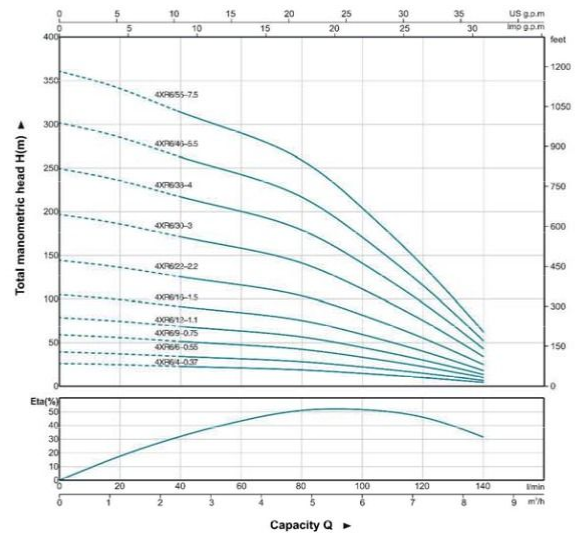

### Technical Data

| Model        | P <sub>2</sub> |               | Delivery |      |     |     |     |     |     |     |     |     |     |  |  |  |  |  |
|--------------|----------------|---------------|----------|------|-----|-----|-----|-----|-----|-----|-----|-----|-----|--|--|--|--|--|
|              | 1 - 220V/240V  | 3 - 380V/415V | KW       | HP   | Q   | 0   | 1.2 | 2.4 | 3.6 | 4.8 | 6.0 | 7.2 | 8.4 |  |  |  |  |  |
| 4XRm6/4-0.37 | 4XR6/4-0.37    | 0.37          | 0.5      | H(m) | 26  | 25  | 23  | 21  | 19  | 15  | 10  | 5   |     |  |  |  |  |  |
| 4XRm6/5-0.55 | 4XR6/5-0.55    | 0.55          | 0.75     |      | 39  | 37  | 34  | 32  | 28  | 22  | 15  | 7   |     |  |  |  |  |  |
| 4XRm6/9-0.75 | 4XR6/9-0.75    | 0.75          | 1        |      | 59  | 56  | 51  | 47  | 42  | 33  | 23  | 10  |     |  |  |  |  |  |
| 4XRm6/12-1.1 | 4XR6/12-1.1    | 1.1           | 1.5      |      | 79  | 74  | 69  | 63  | 57  | 45  | 30  | 14  |     |  |  |  |  |  |
| 4XRm6/16-1.5 | 4XR6/16-1.5    | 1.5           | 2        |      | 105 | 99  | 91  | 84  | 75  | 59  | 40  | 18  |     |  |  |  |  |  |
| 4XRm6/22-2.2 | 4XR6/22-2.2    | 2.2           | 3        |      | 144 | 136 | 126 | 116 | 104 | 82  | 55  | 25  |     |  |  |  |  |  |
| -            | 4XR6/30-3      | 3             | 4        |      | 197 | 186 | 171 | 158 | 141 | 111 | 75  | 34  |     |  |  |  |  |  |
| -            | 4XR6/38-4      | 4             | 5.5      |      | 249 | 236 | 217 | 200 | 179 | 141 | 95  | 43  |     |  |  |  |  |  |
| -            | 4XR6/46-5.5    | 5.5           | 7.5      |      | 302 | 285 | 263 | 243 | 217 | 171 | 115 | 52  |     |  |  |  |  |  |
| -            | 4XR6/55-7.5    | 7.5           | 10       |      | 361 | 341 | 314 | 290 | 259 | 204 | 138 | 62  |     |  |  |  |  |  |


## 4XR 8

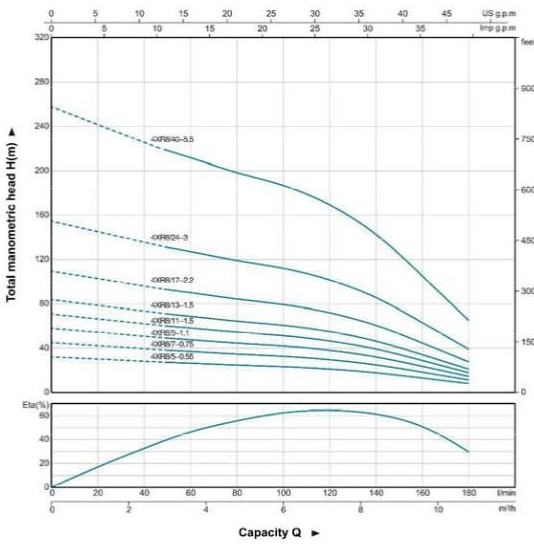

### Technical Data

| Model           |                 | P <sub>2</sub> |      | Q    | Delivery |     |     |     |     |     |     |     |     |      |  |
|-----------------|-----------------|----------------|------|------|----------|-----|-----|-----|-----|-----|-----|-----|-----|------|--|
| 1-<br>220V/240V | 3-<br>380V/415V | KW             | HP   |      | 0        | 1.2 | 2.4 | 3.6 | 4.8 | 6.0 | 7.2 | 8.4 | 9.6 | 10.8 |  |
| 4XR8/5-0.55     | 4XR8/5-0.55     | 0.55           | 0.75 | H(m) | 32       | 30  | 28  | 26  | 25  | 23  | 21  | 18  | 13  | 8    |  |
| 4XR8/7-0.75     | 4XR8/7-0.75     | 0.75           | 1    |      | 45       | 42  | 39  | 37  | 35  | 33  | 30  | 25  | 18  | 11   |  |
| 4XR8/9-1.1      | 4XR8/9-1.1      | 1.1            | 1.5  |      | 58       | 54  | 51  | 48  | 45  | 42  | 38  | 32  | 24  | 15   |  |
| 4XR8/13-1.5     | 4XR8/13-1.5     | 1.5            | 2    |      | 84       | 79  | 73  | 69  | 64  | 61  | 55  | 46  | 34  | 21   |  |
| 4XR8/17-2.2     | 4XR8/17-2.2     | 2.2            | 3    |      | 109      | 103 | 96  | 90  | 84  | 79  | 72  | 61  | 45  | 28   |  |
| -               | 4XR8/24-3       | 3              | 4    |      | 155      | 145 | 135 | 127 | 119 | 112 | 101 | 85  | 63  | 39   |  |
| -               | 4XR8/40-5.5     | 5.5            | 7.5  |      | 258      | 242 | 225 | 212 | 198 | 187 | 169 | 143 | 105 | 65   |  |

## 4XR 10

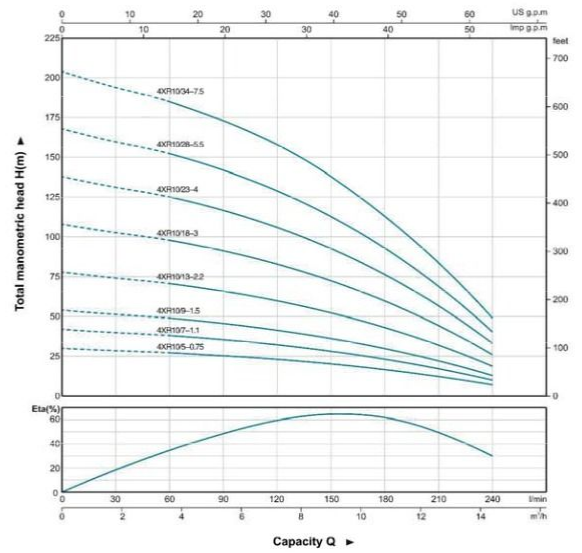

### Technical Data

| Model           |                 | P <sub>2</sub> |     | Q    | Delivery |     |     |     |     |     |      |      |      |      |      |  |  |  |
|-----------------|-----------------|----------------|-----|------|----------|-----|-----|-----|-----|-----|------|------|------|------|------|--|--|--|
| 1-<br>220V/240V | 3-<br>380V/415V | KW             | HP  |      | 0        | 1.8 | 3.6 | 5.4 | 7.2 | 9.0 | 10.8 | 12.6 | 14.4 | 16.2 | 18.0 |  |  |  |
| 4XR10/5-0.75    | 4XR10/5-0.75    | 0.75           | 1   | H(m) | 30       | 29  | 27  | 25  | 23  | 20  | 17   | 12   | 7    |      |      |  |  |  |
| 4XR10/7-1.1     | 4XR10/7-1.1     | 1.1            | 1.5 |      | 42       | 40  | 38  | 35  | 33  | 28  | 23   | 17   | 10   |      |      |  |  |  |
| 4XR10/9-1.5     | 4XR10/9-1.5     | 1.5            | 2   |      | 54       | 51  | 49  | 46  | 42  | 37  | 30   | 22   | 13   |      |      |  |  |  |
| 4XR10/13-2.2    | 4XR10/13-2.2    | 2.2            | 3   |      | 78       | 74  | 71  | 66  | 61  | 53  | 44   | 32   | 19   |      |      |  |  |  |
| -               | 4XR10/18-3      | 3              | 4   |      | 108      | 103 | 98  | 91  | 84  | 73  | 60   | 45   | 26   |      |      |  |  |  |
| -               | 4XR10/24-4      | 4              | 5.5 |      | 138      | 131 | 125 | 116 | 108 | 93  | 77   | 57   | 33   |      |      |  |  |  |
| -               | 4XR10/28-5.5    | 5.5            | 7.5 |      | 168      | 160 | 152 | 142 | 131 | 114 | 94   | 70   | 40   |      |      |  |  |  |
| -               | 4XR10/34-7.5    | 7.5            | 10  |      | 204      | 194 | 185 | 172 | 159 | 138 | 114  | 85   | 49   |      |      |  |  |  |



**3XR 1.5**

| MODEL                        | DN | DIMENSION (mm) |                 |                 |                 |                 | WEIGHT (kgs) |                 |                 |                 |                 |  |  |
|------------------------------|----|----------------|-----------------|-----------------|-----------------|-----------------|--------------|-----------------|-----------------|-----------------|-----------------|--|--|
|                              |    | P              | M <sub>01</sub> | M <sub>02</sub> | T <sub>01</sub> | T <sub>02</sub> | P            | M <sub>01</sub> | M <sub>02</sub> | T <sub>01</sub> | T <sub>02</sub> |  |  |
| 1- 220V/240V<br>3- 380V/415V |    |                |                 |                 |                 |                 |              |                 |                 |                 |                 |  |  |
| 3XRm1.5/7-0.18               | 1" | 351            | 290             | 270             | 641             | 621             | 1.7          | 3.8             | 3.2             | 5.5             | 4.9             |  |  |
| 3XRm1.5/10-0.25              | 1" | 418            | 320             | 290             | 738             | 708             | 2.0          | 4.6             | 3.8             | 6.6             | 5.8             |  |  |
| 3XRm1.5/14-0.37              | 1" | 509            | 350             | 320             | 859             | 829             | 2.3          | 5.5             | 4.6             | 7.8             | 6.9             |  |  |
| 3XRm1.5/20-0.55              | 1" | 668            | 390             | 350             | 1058            | 1018            | 3.1          | 6.6             | 5.5             | 9.7             | 8.6             |  |  |
| 3XRm1.5/27-0.75              | 1" | 826            | 430             | 390             | 1256            | 1216            | 3.8          | 7.8             | 6.6             | 11.6            | 10.4            |  |  |
| 3XRm1.5/37-1.1               | 1" | 1051           | 510             | 430             | 1561            | 1481            | 4.7          | 9.9             | 7.8             | 14.6            | 12.5            |  |  |
| 3XRm1.5/47-1.5               | 1" | 1300           | 596             | 510             | 1896            | 1810            | 5.8          | 12.1            | 9.9             | 17.9            | 16.7            |  |  |



**4XR 2**

| MODEL                        | DN       | DIMENSION (mm) |                 |                 |                 |                 | WEIGHT (kgs) |                 |                 |                 |                 |  |  |
|------------------------------|----------|----------------|-----------------|-----------------|-----------------|-----------------|--------------|-----------------|-----------------|-----------------|-----------------|--|--|
|                              |          | P              | M <sub>01</sub> | M <sub>02</sub> | T <sub>01</sub> | T <sub>02</sub> | P            | M <sub>01</sub> | M <sub>02</sub> | T <sub>01</sub> | T <sub>02</sub> |  |  |
| 1- 220V/240V<br>3- 380V/415V |          |                |                 |                 |                 |                 |              |                 |                 |                 |                 |  |  |
| 4XRm2/4-0.18                 | 1 1/2"   | 322            | 255             | 255             | 577             | 577             | 2.5          | 5.4             | 5.4             | 7.9             | 7.9             |  |  |
| 4XRm2/6-0.25                 | 1 1/2"   | 372            | 265             | 265             | 637             | 637             | 3.0          | 5.9             | 5.9             | 8.9             | 8.9             |  |  |
| 4XRm2/8-0.37                 | 1 1/2"   | 421            | 285             | 275             | 706             | 696             | 3.5          | 6.9             | 6.4             | 10.4            | 9.9             |  |  |
| 4XRm2/11-0.55                | 1 1/2"   | 496            | 300             | 285             | 796             | 781             | 4.3          | 7.7             | 6.9             | 12.0            | 11.2            |  |  |
| 4XRm2/15-0.75                | 1 1/2"   | 595            | 325             | 300             | 920             | 895             | 5.2          | 8.9             | 7.7             | 14.1            | 12.9            |  |  |
| 4XRm2/21-1.1                 | 1 1/2"   | 775            | 360             | 325             | 1135            | 1100            | 6.7          | 10.7            | 8.9             | 17.4            | 15.6            |  |  |
| 4XRm2/28-1.5                 | 1 1/2"   | 949            | 390             | 360             | 1339            | 1309            | 8.4          | 12.2            | 10.7            | 20.6            | 19.1            |  |  |
| 4XRm2/40-2.2                 | 1 1/2"   | 1302           | 470             | 440             | 1772            | 1742            | 11.4         | 15.4            | 13.9            | 26.8            | 25.3            |  |  |
| -                            | 4XR2/2-3 | 1600           | -               | 505             | -               | 2105            | 14.3         | -               | 16.9            | -               | 31.2            |  |  |
| -                            | 4XR2/4-4 | 1897           | -               | 565             | -               | 2462            | 17.3         | -               | 19.9            | -               | 37.2            |  |  |



**3XR 2.5**

| MODEL                        | DN | DIMENSION (mm) |                 |                 |                 |                 | WEIGHT (kgs) |                 |                 |                 |                 |  |  |
|------------------------------|----|----------------|-----------------|-----------------|-----------------|-----------------|--------------|-----------------|-----------------|-----------------|-----------------|--|--|
|                              |    | P              | M <sub>01</sub> | M <sub>02</sub> | T <sub>01</sub> | T <sub>02</sub> | P            | M <sub>01</sub> | M <sub>02</sub> | T <sub>01</sub> | T <sub>02</sub> |  |  |
| 1- 220V/240V<br>3- 380V/415V |    |                |                 |                 |                 |                 |              |                 |                 |                 |                 |  |  |
| 3XRm2.5/5-0.18               | 1" | 324            | 290             | 270             | 614             | 594             | 2.3          | 3.8             | 3.2             | 6.1             | 5.5             |  |  |
| 3XRm2.5/7-0.25               | 1" | 376            | 320             | 290             | 696             | 666             | 2.6          | 4.6             | 3.8             | 7.2             | 6.4             |  |  |
| 3XRm2.5/10-0.37              | 1" | 454            | 350             | 320             | 804             | 774             | 3.1          | 5.5             | 4.6             | 8.6             | 7.7             |  |  |
| 3XRm2.5/15-0.55              | 1" | 584            | 390             | 350             | 974             | 934             | 3.8          | 6.6             | 5.5             | 10.4            | 9.3             |  |  |
| 3XRm2.5/20-0.75              | 1" | 738            | 430             | 390             | 1168            | 1128            | 4.6          | 7.8             | 6.6             | 12.4            | 11.2            |  |  |
| 3XRm2.5/28-1.1               | 1" | 946            | 510             | 430             | 1456            | 1376            | 5.8          | 9.9             | 7.8             | 15.7            | 13.6            |  |  |
| 3XRm2.5/36-1.5               | 1" | 1154           | 596             | 510             | 1750            | 1664            | 6.9          | 12.1            | 9.9             | 19.0            | 16.8            |  |  |



**4XR 3**

| MODEL                        | DN          | DIMENSION (mm) |                 |                 |                 |                 | WEIGHT (kgs) |                 |                 |                 |                 |  |  |
|------------------------------|-------------|----------------|-----------------|-----------------|-----------------|-----------------|--------------|-----------------|-----------------|-----------------|-----------------|--|--|
|                              |             | P              | M <sub>01</sub> | M <sub>02</sub> | T <sub>01</sub> | T <sub>02</sub> | P            | M <sub>01</sub> | M <sub>02</sub> | T <sub>01</sub> | T <sub>02</sub> |  |  |
| 1- 220V/240V<br>3- 380V/415V |             |                |                 |                 |                 |                 |              |                 |                 |                 |                 |  |  |
| 4XRm3/3-0.18                 | 1 1/2"      | 301            | 255             | 255             | 556             | 556             | 2.5          | 5.4             | 5.4             | 7.9             | 7.9             |  |  |
| 4XRm3/4-0.25                 | 1 1/2"      | 327            | 265             | 265             | 592             | 592             | 2.8          | 5.9             | 5.9             | 8.7             | 8.7             |  |  |
| 4XRm3/6-0.37                 | 1 1/2"      | 379            | 285             | 275             | 664             | 654             | 3.3          | 6.9             | 6.4             | 10.2            | 9.7             |  |  |
| 4XRm3/8-0.55                 | 1 1/2"      | 431            | 300             | 285             | 731             | 716             | 3.8          | 7.7             | 6.9             | 11.5            | 10.7            |  |  |
| 4XRm3/11-0.75                | 1 1/2"      | 509            | 325             | 300             | 834             | 809             | 4.6          | 8.9             | 7.7             | 13.5            | 12.3            |  |  |
| 4XRm3/16-1.1                 | 1 1/2"      | 639            | 360             | 325             | 999             | 964             | 5.9          | 10.7            | 8.9             | 16.6            | 14.8            |  |  |
| 4XRm3/22-1.5                 | 1 1/2"      | 827            | 390             | 360             | 1217            | 1187            | 7.4          | 12.2            | 10.7            | 19.6            | 18.1            |  |  |
| 4XRm3/30-2.2                 | 1 1/2"      | 1059           | 470             | 440             | 1529            | 1499            | 9.5          | 15.4            | 13.9            | 24.9            | 23.4            |  |  |
| -                            | 4XR3/40-3   | 1350           | -               | 505             | -               | 1855            | 12.1         | -               | 16.9            | -               | 29.0            |  |  |
| -                            | 4XR3/50-4   | 1610           | -               | 565             | -               | 2175            | 14.7         | -               | 19.9            | -               | 34.6            |  |  |
| -                            | 4XR3/62-5.5 | 1922           | -               | 625             | -               | 2547            | 17.8         | -               | 22.9            | -               | 40.7            |  |  |



**3.5XR 2.5**

| MODEL                        | DN     | DIMENSION (mm) |                 |                 |                 |                 | WEIGHT (kgs) |                 |                 |                 |                 |  |  |
|------------------------------|--------|----------------|-----------------|-----------------|-----------------|-----------------|--------------|-----------------|-----------------|-----------------|-----------------|--|--|
|                              |        | P              | M <sub>01</sub> | M <sub>02</sub> | T <sub>01</sub> | T <sub>02</sub> | P            | M <sub>01</sub> | M <sub>02</sub> | T <sub>01</sub> | T <sub>02</sub> |  |  |
| 1- 220V/240V<br>3- 380V/415V |        |                |                 |                 |                 |                 |              |                 |                 |                 |                 |  |  |
| 3.5XRm2.5/4-0.18             | 1 1/2" | 286            | 278             | 263             | 564             | 549             | 1.8          | 4.7             | 4.1             | 6.5             | 5.9             |  |  |
| 3.5XRm2.5/6-0.25             | 1 1/2" | 333            | 293             | 278             | 626             | 611             | 2.1          | 5.3             | 4.7             | 7.4             | 6.8             |  |  |
| 3.5XRm2.5/10-0.37            | 1 1/2" | 425            | 313             | 293             | 738             | 718             | 2.7          | 6.1             | 5.3             | 8.8             | 8.0             |  |  |
| 3.5XRm2.5/14-0.55            | 1 1/2" | 517            | 338             | 313             | 855             | 830             | 3.4          | 7.0             | 6.1             | 10.4            | 9.5             |  |  |
| 3.5XRm2.5/18-0.75            | 1 1/2" | 610            | 363             | 338             | 973             | 948             | 4.1          | 8.0             | 7.0             | 12.1            | 11.1            |  |  |
| 3.5XRm2.5/26-1.1             | 1 1/2" | 819            | 414             | 363             | 1233            | 1182            | 5.6          | 9.8             | 8.0             | 15.4            | 13.6            |  |  |
| 3.5XRm2.5/34-1.5             | 1 1/2" | 1003           | 550             | 414             | 1553            | 1417            | 6.9          | 11.6            | 9.8             | 18.5            | 16.7            |  |  |
| 3.5XRm2.5/46-2.2             | 1 1/2" | 1305           | 534             | 550             | 1839            | 1855            | 9.0          | 14.5            | 11.6            | 23.5            | 20.6            |  |  |



**4XR 4**

| MODEL                        | DN          | DIMENSION (mm) |                 |                 |                 |                 | WEIGHT (kgs) |                 |                 |                 |                 |  |  |
|------------------------------|-------------|----------------|-----------------|-----------------|-----------------|-----------------|--------------|-----------------|-----------------|-----------------|-----------------|--|--|
|                              |             | P              | M <sub>01</sub> | M <sub>02</sub> | T <sub>01</sub> | T <sub>02</sub> | P            | M <sub>01</sub> | M <sub>02</sub> | T <sub>01</sub> | T <sub>02</sub> |  |  |
| 1- 220V/240V<br>3- 380V/415V |             |                |                 |                 |                 |                 |              |                 |                 |                 |                 |  |  |
| 4XRm4/3-0.25                 | 1 1/2"      | 309            | 265             | 265             | 574             | 574             | 2.7          | 5.9             | 5.9             | 8.6             | 8.6             |  |  |
| 4XRm4/5-0.37                 | 1 1/2"      | 367            | 285             | 275             | 652             | 642             | 3.3          | 6.9             | 6.4             | 10.2            | 9.7             |  |  |
| 4XRm4/7-0.55                 | 1 1/2"      | 425            | 300             | 285             | 725             | 710             | 3.8          | 7.7             | 6.9             | 11.5            | 10.7            |  |  |
| 4XRm4/10-0.75                | 1 1/2"      | 511            | 325             | 300             | 836             | 811             | 4.6          | 8.9             | 7.7             | 13.5            | 12.3            |  |  |
| 4XRm4/14-1.1                 | 1 1/2"      | 626            | 360             | 325             | 986             | 951             | 5.7          | 10.7            | 8.9             | 16.4            | 14.6            |  |  |
| 4XRm4/19-1.5                 | 1 1/2"      | 770            | 390             | 360             | 1160            | 1130            | 7.1          | 12.2            | 10.7            | 19.3            | 17.8            |  |  |
| 4XRm4/26-2.2                 | 1 1/2"      | 1003           | 470             | 440             | 1473            | 1443            | 9.0          | 15.4            | 13.9            | 24.4            | 22.9            |  |  |
| -                            | 4XR4/34-3   | 1258           | -               | 505             | -               | 1753            | 11.1         | -               | 16.9            | -               | 28.0            |  |  |
| -                            | 4XR4/44-4   | 1577           | -               | 565             | -               | 2142            | 13.8         | -               | 19.9            | -               | 33.7            |  |  |
| -                            | 4XR4/54-5.5 | 1865           | -               | 625             | -               | 2490            | 16.6         | -               | 22.9            | -               | 39.5            |  |  |



**4XR 6**

| MODEL           |                 | DN     | DIMENSION (mm) |                 |                 |                 |                 |      | WEIGHT (kgs)    |                 |                 |                 |  |  |
|-----------------|-----------------|--------|----------------|-----------------|-----------------|-----------------|-----------------|------|-----------------|-----------------|-----------------|-----------------|--|--|
| 1-<br>220V/240V | 3-<br>380V/415V |        | P              | M <sub>03</sub> | M <sub>01</sub> | T <sub>03</sub> | T <sub>01</sub> | P    | M <sub>03</sub> | M <sub>01</sub> | T <sub>03</sub> | T <sub>01</sub> |  |  |
| 4XRm6/4-0.37    | 4XR6/4-0.37     | 1 1/2" | 369            | 285             | 275             | 654             | 644             | 3.2  | 6.9             | 6.4             | 10.1            | 9.6             |  |  |
| 4XRm6/6-0.55    | 4XR6/6-0.55     | 1 1/2" | 431            | 300             | 285             | 731             | 716             | 3.8  | 7.7             | 6.9             | 11.5            | 10.7            |  |  |
| 4XRm6/9-0.75    | 4XR6/9-0.75     | 1 1/2" | 522            | 325             | 300             | 847             | 822             | 4.7  | 8.9             | 7.7             | 13.6            | 12.4            |  |  |
| 4XRm6/12-1.1    | 4XR6/12-1.1     | 1 1/2" | 614            | 360             | 325             | 974             | 939             | 5.5  | 10.7            | 8.9             | 16.2            | 14.4            |  |  |
| 4XRm6/16-1.5    | 4XR6/16-1.5     | 1 1/2" | 737            | 390             | 360             | 1127            | 1097            | 6.6  | 12.2            | 10.7            | 18.8            | 17.3            |  |  |
| 4XRm6/22-2.2    | 4XR6/22-2.2     | 1 1/2" | 952            | 470             | 440             | 1422            | 1392            | 8.3  | 15.4            | 13.9            | 23.7            | 22.2            |  |  |
| -               | 4XR6/30-3       | 1 1/2" | 1197           | -               | 505             | -               | 1702            | 10.6 | -               | 16.9            | -               | 27.5            |  |  |
| -               | 4XR6/38-4       | 1 1/2" | 1441           | -               | 565             | -               | 2006            | 12.9 | -               | 19.9            | -               | 32.8            |  |  |
| -               | 4XR6/46-5.5     | 1 1/2" | 1718           | -               | 625             | -               | 2343            | 15.2 | -               | 22.9            | -               | 38.1            |  |  |
| -               | 4XR6/55-7.5     | 1 1/2" | 1993           | -               | 685             | -               | 2678            | 17.7 | -               | 25.9            | -               | 43.6            |  |  |



**4XR 12**

| MODEL           |                 | DN     | DIMENSION (mm) |                 |                 |                 |                 |      | WEIGHT (kgs)    |                 |                 |                 |  |  |
|-----------------|-----------------|--------|----------------|-----------------|-----------------|-----------------|-----------------|------|-----------------|-----------------|-----------------|-----------------|--|--|
| 1-<br>220V/240V | 3-<br>380V/415V |        | P              | M <sub>03</sub> | M <sub>01</sub> | T <sub>03</sub> | T <sub>01</sub> | P    | M <sub>03</sub> | M <sub>01</sub> | T <sub>03</sub> | T <sub>01</sub> |  |  |
| 4XRm12/3-0.75   | 4XR12/3-0.75    | 1 1/2" | 402            | 325             | 300             | 727             | 702             | 3.9  | 6.9             | 7.7             | 12.8            | 11.6            |  |  |
| 4XRm12/5-1.1    | 4XR12/5-1.1     | 1 1/2" | 499            | 360             | 325             | 859             | 824             | 4.7  | 10.7            | 8.9             | 15.4            | 13.6            |  |  |
| 4XRm12/7-1.5    | 4XR12/7-1.5     | 1 1/2" | 596            | 390             | 360             | 986             | 956             | 5.5  | 12.2            | 10.7            | 17.7            | 16.2            |  |  |
| 4XRm12/11-2.2   | 4XR12/11-2.2    | 1 1/2" | 791            | 470             | 440             | 1261            | 1231            | 7.0  | 15.4            | 13.9            | 22.4            | 20.9            |  |  |
| -               | 4XR12/15-3      | 1 1/2" | 985            | -               | 505             | -               | 1094            | 8.5  | -               | 16.9            | -               | 25.4            |  |  |
| -               | 4XR12/19-4      | 1 1/2" | 1179           | -               | 565             | -               | 1744            | 10.0 | -               | 19.9            | -               | 29.9            |  |  |
| -               | 4XR12/23-5.5    | 1 1/2" | 1405           | -               | 625             | -               | 2030            | 11.5 | -               | 22.9            | -               | 34.4            |  |  |
| -               | 4XR12/28-7.5    | 1 1/2" | 1648           | -               | 685             | -               | 2333            | 13.4 | -               | 25.9            | -               | 39.3            |  |  |




**4XR 8**

| MODEL           |                 | DN     | DIMENSION (mm) |                 |                 |                 |                 |      | WEIGHT (kgs)    |                 |                 |                 |  |  |
|-----------------|-----------------|--------|----------------|-----------------|-----------------|-----------------|-----------------|------|-----------------|-----------------|-----------------|-----------------|--|--|
| 1-<br>220V/240V | 3-<br>380V/415V |        | P              | M <sub>03</sub> | M <sub>01</sub> | T <sub>03</sub> | T <sub>01</sub> | P    | M <sub>03</sub> | M <sub>01</sub> | T <sub>03</sub> | T <sub>01</sub> |  |  |
| 4XRm8/5-0.55    | 4XR8/5-0.55     | 1 1/2" | 437            | 300             | 285             | 737             | 722             | 3.8  | 7.7             | 6.9             | 11.5            | 10.7            |  |  |
| 4XRm8/7-0.75    | 4XR8/7-0.75     | 1 1/2" | 513            | 325             | 300             | 838             | 813             | 4.4  | 8.9             | 7.7             | 13.3            | 12.1            |  |  |
| 4XRm8/9-1.1     | 4XR8/9-1.1      | 1 1/2" | 589            | 360             | 325             | 949             | 914             | 4.9  | 10.7            | 8.9             | 15.6            | 13.8            |  |  |
| 4XRm8/13-1.5    | 4XR8/13-1.5     | 1 1/2" | 741            | 390             | 360             | 1131            | 1101            | 6.1  | 12.2            | 10.7            | 18.3            | 16.8            |  |  |
| 4XRm8/17-2.2    | 4XR8/17-2.2     | 1 1/2" | 893            | 470             | 440             | 1363            | 1333            | 7.3  | 15.4            | 13.9            | 22.7            | 21.2            |  |  |
| -               | 4XR8/24-3       | 1 1/2" | 1191           | -               | 505             | -               | 1696            | 9.4  | -               | 16.9            | -               | 26.3            |  |  |
| -               | 4XR8/32-4       | 1 1/2" | 1495           | -               | 565             | -               | 2060            | 11.8 | -               | 19.9            | -               | 31.7            |  |  |
| -               | 4XR8/40-5.5     | 1 1/2" | 1830           | -               | 625             | -               | 2455            | 14.4 | -               | 22.9            | -               | 37.0            |  |  |
| -               | 4XR8/48-7.5     | 1 1/2" | 2134           | -               | 685             | -               | 2819            | 16.5 | -               | 25.9            | -               | 42.4            |  |  |



**4XRS2**

| MODEL           |                 | DN     | DIMENSION (mm) |                 |                 |                 |                 |      | WEIGHT (kgs)    |                 |                 |                 |  |  |
|-----------------|-----------------|--------|----------------|-----------------|-----------------|-----------------|-----------------|------|-----------------|-----------------|-----------------|-----------------|--|--|
| 1-<br>220V/240V | 3-<br>380V/415V |        | P              | M <sub>03</sub> | M <sub>01</sub> | T <sub>03</sub> | T <sub>01</sub> | P    | M <sub>03</sub> | M <sub>01</sub> | T <sub>03</sub> | T <sub>01</sub> |  |  |
| 4XRSm2/5-0.25   | 4XRS2/5-0.25    | 1 1/2" | 260            | 265             | 265             | 625             | 625             | 2.3  | 5.9             | 5.9             | 8.2             | 8.2             |  |  |
| 4XRSm2/9-0.37   | 4XRS2/9-0.37    | 1 1/2" | 344            | 285             | 275             | 629             | 619             | 3.1  | 6.9             | 6.4             | 10.0            | 9.5             |  |  |
| 4XRSm2/13-0.55  | 4XRS2/13-0.55   | 1 1/2" | 428            | 300             | 285             | 728             | 713             | 4.0  | 7.7             | 6.9             | 11.7            | 10.9            |  |  |
| 4XRSm2/18-0.75  | 4XRS2/18-0.75   | 1 1/2" | 533            | 325             | 300             | 858             | 833             | 5.1  | 8.9             | 7.7             | 14.0            | 12.8            |  |  |
| 4XRSm2/25-1.1   | 4XRS2/25-1.1    | 1 1/2" | 680            | 360             | 325             | 1040            | 1005            | 6.6  | 10.7            | 8.9             | 17.3            | 15.5            |  |  |
| 4XRSm2/33-1.5   | 4XRS2/33-1.5    | 1 1/2" | 848            | 390             | 360             | 1238            | 1208            | 8.3  | 12.2            | 10.7            | 20.5            | 19.0            |  |  |
| 4XRSm2/48-2.2   | 4XRS2/48-2.2    | 1 1/2" | 1163           | 470             | 440             | 1633            | 1603            | 11.5 | 15.4            | 13.9            | 26.9            | 25.4            |  |  |
| -               | 4XRS2/63-3      | 1 1/2" | 1487           | -               | 505             | -               | 1983            | 14.8 | -               | 16.9            | -               | 31.7            |  |  |



**4XR 10**

| MODEL           |                 | DN     | DIMENSION (mm) |                 |                 |                 |                 |      | WEIGHT (kgs)    |                 |                 |                 |  |  |
|-----------------|-----------------|--------|----------------|-----------------|-----------------|-----------------|-----------------|------|-----------------|-----------------|-----------------|-----------------|--|--|
| 1-<br>220V/240V | 3-<br>380V/415V |        | P              | M <sub>03</sub> | M <sub>01</sub> | T <sub>03</sub> | T <sub>01</sub> | P    | M <sub>03</sub> | M <sub>01</sub> | T <sub>03</sub> | T <sub>01</sub> |  |  |
| 4XRm10/5-0.75   | 4XR10/5-0.75    | 1 1/2" | 437            | 325             | 300             | 762             | 737             | 3.8  | 8.9             | 7.7             | 12.7            | 11.5            |  |  |
| 4XRm10/7-1.1    | 4XR10/7-1.1     | 1 1/2" | 513            | 360             | 325             | 873             | 838             | 4.4  | 10.7            | 8.9             | 15.1            | 13.3            |  |  |
| 4XRm10/9-1.5    | 4XR10/9-1.5     | 1 1/2" | 589            | 390             | 360             | 979             | 949             | 4.9  | 12.2            | 10.7            | 17.1            | 15.6            |  |  |
| 4XRm10/13-2.2   | 4XR10/13-2.2    | 1 1/2" | 741            | 470             | 440             | 1211            | 1181            | 6.1  | 15.4            | 13.9            | 21.5            | 20.0            |  |  |
| -               | 4XR10/18-3      | 1 1/2" | 931            | -               | 505             | -               | 1436            | 7.6  | -               | 16.9            | -               | 24.5            |  |  |
| -               | 4XR10/24-4      | 1 1/2" | 1153           | -               | 565             | -               | 1718            | 9.1  | -               | 19.9            | -               | 29.0            |  |  |
| -               | 4XR10/28-5.5    | 1 1/2" | 1343           | -               | 625             | -               | 1968            | 10.6 | -               | 22.9            | -               | 33.5            |  |  |
| -               | 4XR10/34-7.5    | 1 1/2" | 1571           | -               | 685             | -               | 2256            | 12.3 | -               | 25.9            | -               | 38.2            |  |  |



**4XRS3**

| MODEL           |                 | DN     | DIMENSION (mm) |                 |                 |                 |                 |      | WEIGHT (kgs)    |                 |                 |                 |  |  |
|-----------------|-----------------|--------|----------------|-----------------|-----------------|-----------------|-----------------|------|-----------------|-----------------|-----------------|-----------------|--|--|
| 1-<br>220V/240V | 3-<br>380V/415V |        | P              | M <sub>03</sub> | M <sub>01</sub> | T <sub>03</sub> | T <sub>01</sub> | P    | M <sub>03</sub> | M <sub>01</sub> | T <sub>03</sub> | T <sub>01</sub> |  |  |
| 4XRSm3/4-0.25   | 4XRS3/4-0.25    | 1 1/2" | 239            | 265             | 265             | 504             | 504             | 2.1  | 5.9             | 5.9             | 8.0             | 8.0             |  |  |
| 4XRSm3/6-0.37   | 4XRS3/6-0.37    | 1 1/2" | 281            | 285             | 275             | 566             | 566             | 2.5  | 6.9             | 6.4             | 9.4             | 8.9             |  |  |
| 4XRSm3/9-0.55   | 4XRS3/9-0.55    | 1 1/2" | 344            | 300             | 285             | 644             | 629             | 3.2  | 7.7             | 6.9             | 10.9            | 10.1            |  |  |
| 4XRSm3/12-0.75  | 4XRS3/12-0.75   | 1 1/2" | 407            | 325             | 300             | 732             | 707             | 3.8  | 8.9             | 7.7             | 12.7            | 11.5            |  |  |
| 4XRSm3/18-1.1   | 4XRS3/18-1.1    | 1 1/2" | 533            | 360             | 325             | 839             | 858             | 5.1  | 10.7            | 8.9             | 15.8            | 14.0            |  |  |
| 4XRSm3/25-1.5   | 4XRS3/25-1.5    | 1 1/2" | 680            | 390             | 360             | 1070            | 1040            | 6.6  | 12.2            | 10.7            | 18.8            | 17.3            |  |  |
| 4XRSm3/33-2.2   | 4XRS3/33-2.2    | 1 1/2" | 848            | 470             | 440             | 1318            | 1288            | 8.4  | 15.4            | 13.9            | 23.8            | 22.3            |  |  |
| -               | 4XRS3/44-3      | 1 1/2" | 1079           | -               | 505             | -               | 1584            | 10.8 | -               | 16.9            | -               | 27.7            |  |  |
| -               | 4XRS3/58-4      | 1 1/2" | 1373           | -               | 565             | -               | 1938            | 13.8 | -               | 19.9            | -               | 33.7            |  |  |

