



4XRS2

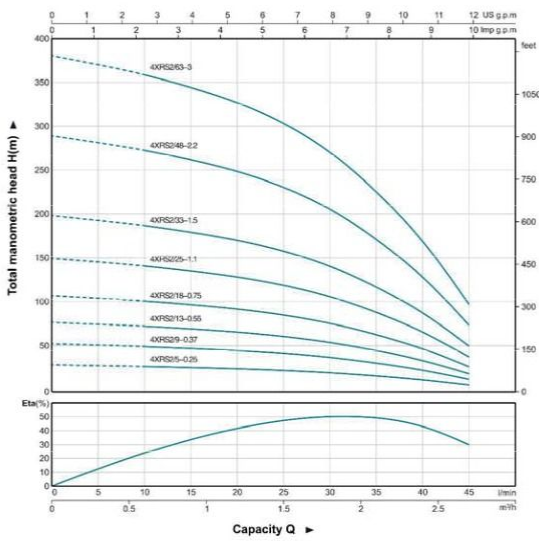

Technical Data

| Model | P ₂ | KW | HP | Q | Delivery | | | | | | | | | | | | | | | | |
|---------------|----------------|------|------|------|----------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|--|--|--|--|--|--|
| | | | | | m³/h | 0 | 0.5 | 0.6 | 0.9 | 1.2 | 1.5 | 1.8 | 2.1 | 2.4 | 2.7 | | | | | | |
| 1 - 220V/240V | 3 - 380V/415V | | | | 0 | 5 | 10 | 15 | 20 | 25 | 30 | 35 | 40 | 45 | | | | | | | |
| 4XRS2/5-0.25 | 4XRS2/5-0.25 | 0.25 | 0.33 | H(m) | 30 | 29 | 28 | 27 | 25 | 24 | 21 | 18 | 13 | 8 | | | | | | | |
| 4XRS2/9-0.37 | 4XRS2/9-0.37 | 0.37 | 0.5 | | 53 | 52 | 50 | 48 | 46 | 43 | 38 | 32 | 24 | 14 | | | | | | | |
| 4XRS2/13-0.55 | 4XRS2/13-0.55 | 0.55 | 0.75 | | 77 | 75 | 73 | 70 | 66 | 61 | 55 | 46 | 34 | 20 | | | | | | | |
| 4XRS2/18-0.75 | 4XRS2/18-0.75 | 0.75 | 1 | | 107 | 104 | 101 | 97 | 92 | 85 | 76 | 63 | 48 | 28 | | | | | | | |
| 4XRS2/25-1.1 | 4XRS2/25-1.1 | 1.1 | 1.5 | | 148 | 144 | 140 | 134 | 127 | 118 | 106 | 88 | 66 | 38 | | | | | | | |
| 4XRS2/33-1.5 | 4XRS2/33-1.5 | 1.5 | 2 | | 195 | 190 | 184 | 177 | 168 | 156 | 139 | 116 | 87 | 51 | | | | | | | |
| 4XRS2/46-2.2 | 4XRS2/46-2.2 | 2.2 | 3 | | 284 | 277 | 268 | 258 | 245 | 227 | 203 | 169 | 127 | 74 | | | | | | | |
| - | 4XRS2/63-3 | 3 | 4 | | 373 | 363 | 352 | 338 | 321 | 298 | 266 | 222 | 167 | 97 | | | | | | | |


4XRS3

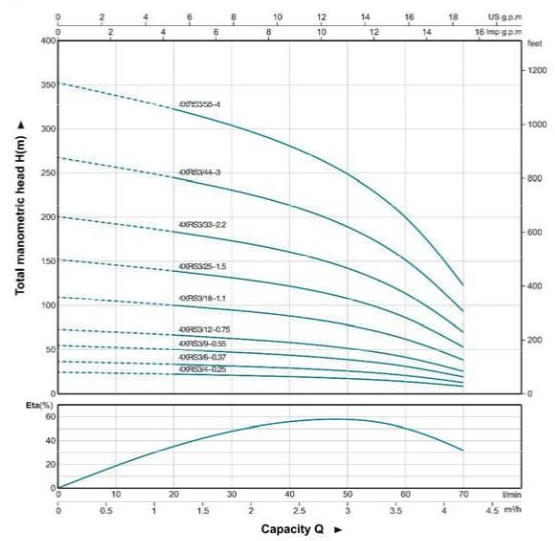

Technical Data

| Model | P ₂ | KW | HP | Q | Delivery | | | | | | | | |
|---------------|----------------|------|------|------|----------|-----|-----|-----|-----|-----|-----|-----|-----|
| | | | | | m³/h | 0 | 0.6 | 1.2 | 1.8 | 2.4 | 3.0 | 3.6 | 4.2 |
| 1 - 220V/240V | 3 - 380V/415V | | | | 0 | 10 | 20 | 30 | 40 | 50 | 60 | 70 | |
| 4XRS3/4-0.25 | 4XRS3/4-0.25 | 0.25 | 0.33 | H(m) | 24 | 23 | 22 | 21 | 19 | 17 | 14 | 8 | |
| 4XRS3/6-0.37 | 4XRS3/6-0.37 | 0.37 | 0.5 | | 36 | 35 | 33 | 31 | 29 | 26 | 21 | 13 | |
| 4XRS3/9-0.55 | 4XRS3/9-0.55 | 0.55 | 0.75 | | 55 | 52 | 50 | 47 | 44 | 39 | 31 | 19 | |
| 4XRS3/12-0.75 | 4XRS3/12-0.75 | 0.75 | 1 | | 73 | 70 | 67 | 63 | 58 | 51 | 41 | 25 | |
| 4XRS3/18-1.1 | 4XRS3/18-1.1 | 1.1 | 1.5 | | 109 | 105 | 100 | 94 | 87 | 77 | 62 | 38 | |
| 4XRS3/25-1.5 | 4XRS3/25-1.5 | 1.5 | 2 | | 152 | 146 | 139 | 131 | 121 | 107 | 86 | 53 | |
| 4XRS3/33-2.2 | 4XRS3/33-2.2 | 2.2 | 3 | | 201 | 192 | 183 | 173 | 160 | 142 | 114 | 70 | |
| - | 4XRS3/44-3 | 3 | 4 | | 267 | 256 | 245 | 230 | 213 | 189 | 151 | 93 | |
| - | 4XRS3/58-4 | 4 | 5.5 | 352 | 338 | 322 | 303 | 281 | 249 | 200 | 123 | | |


4XRS5

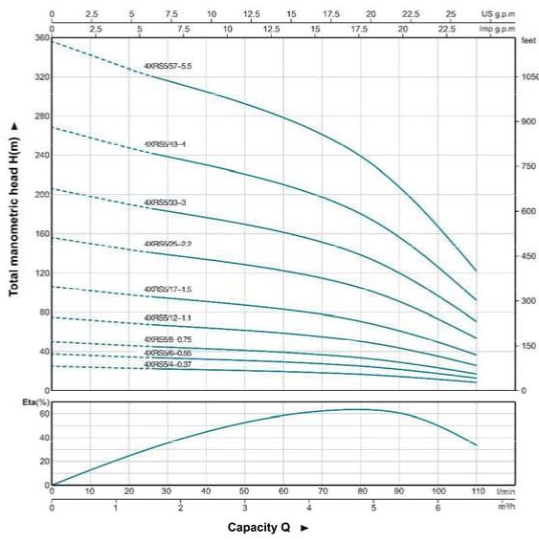

Technical Data

| Model | | P ₂ | | Delivery | | | | | | | | | | | | | | | | |
|---------------|-------------|----------------|------|----------|------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|--|--|--|--|
| 1= | 3= | KW | HP | Q | m³/h | | | | | | | | | | | | | | | |
| 220V/240V | 380V/415V | | | l/min | 0 | 0.6 | 1.2 | 1.8 | 2.4 | 3.0 | 3.6 | 4.2 | 4.8 | 5.4 | 6.0 | 6.6 | | | | |
| 4XRSm6/4-0.37 | 4XRS/4-0.37 | 0.37 | 0.5 | H(m) | 25 | 24 | 23 | 22 | 21 | 21 | 20 | 18 | 17 | 15 | 12 | 9 | | | | |
| 4XRSm6/6-0.55 | 4XRS/6-0.55 | 0.55 | 0.75 | | 37 | 36 | 35 | 33 | 32 | 31 | 29 | 27 | 25 | 22 | 18 | 13 | | | | |
| 4XRSm6/8-0.75 | 4XRS/8-0.75 | 0.75 | 1 | | 50 | 48 | 46 | 44 | 43 | 41 | 39 | 37 | 34 | 29 | 23 | 17 | | | | |
| 4XRSm6/12-1.1 | 4XRS/12-1.1 | 1.1 | 1.5 | | 75 | 72 | 69 | 67 | 64 | 62 | 59 | 55 | 50 | 44 | 35 | 26 | | | | |
| 4XRSm6/17-1.5 | 4XRS/17-1.5 | 1.5 | 2 | | 106 | 102 | 98 | 94 | 91 | 87 | 83 | 78 | 71 | 62 | 50 | 36 | | | | |
| 4XRSm6/25-2.2 | 4XRS/25-2.2 | 2.2 | 3 | | 156 | 150 | 144 | 139 | 134 | 129 | 122 | 114 | 105 | 91 | 73 | 54 | | | | |
| - | 4XRS/33-3 | 3 | 4 | | 206 | 198 | 190 | 183 | 177 | 170 | 162 | 151 | 138 | 120 | 97 | 71 | | | | |
| - | 4XRS/43-4 | 4 | 5.5 | | 269 | 258 | 247 | 238 | 230 | 221 | 210 | 197 | 180 | 156 | 126 | 92 | | | | |
| - | 4XRS/57-5.5 | 5.5 | 7.5 | | 356 | 342 | 328 | 316 | 305 | 293 | 279 | 261 | 239 | 207 | 167 | 122 | | | | |

4XRS8

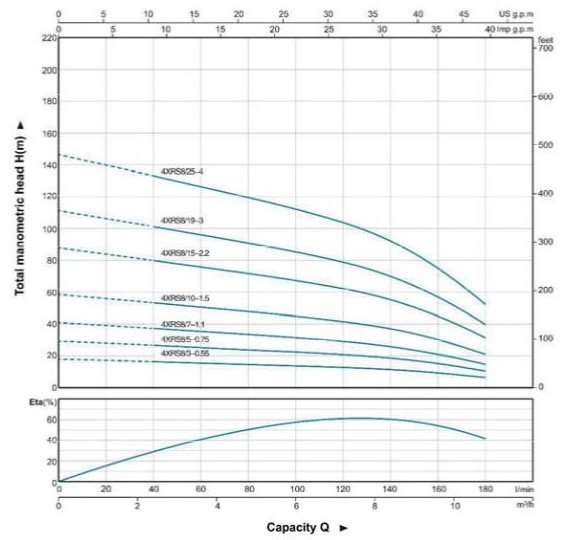

Technical Data

| Model | | P ₂ | | Delivery | | | | | | | | | | | | | | | | |
|---------------|-------------|----------------|------|----------|------|-----|-----|-----|-----|-----|-----|-----|-----|------|--|--|--|--|--|--|
| 1= | 3= | KW | HP | Q | m³/h | | | | | | | | | | | | | | | |
| 220V/240V | 380V/415V | | | l/min | 0 | 1.2 | 2.4 | 3.6 | 4.8 | 6.0 | 7.2 | 8.4 | 9.6 | 10.8 | | | | | | |
| 4XRSm8/3-0.55 | 4XRS/3-0.55 | 0.55 | 0.75 | H(m) | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 9 | 6 | | | | | | |
| 4XRSm8/5-0.75 | 4XRS/5-0.75 | 0.75 | 1 | | 29 | 28 | 27 | 25 | 24 | 22 | 21 | 19 | 15 | 10 | | | | | | |
| 4XRSm8/7-1.1 | 4XRS/7-1.1 | 1.1 | 1.5 | | 41 | 39 | 37 | 35 | 33 | 31 | 29 | 26 | 21 | 15 | | | | | | |
| 4XRSm8/10-1.5 | 4XRS/10-1.5 | 1.5 | 2 | | 59 | 56 | 53 | 50 | 47 | 45 | 41 | 37 | 30 | 21 | | | | | | |
| 4XRSm8/15-2.2 | 4XRS/15-2.2 | 2.2 | 3 | | 88 | 84 | 80 | 75 | 71 | 67 | 62 | 56 | 45 | 31 | | | | | | |
| - | 4XRS/19-3 | 3 | 4 | | 111 | 106 | 101 | 96 | 90 | 85 | 79 | 71 | 58 | 40 | | | | | | |
| - | 4XRS/25-4 | 4 | 5.5 | | 146 | 140 | 133 | 126 | 119 | 111 | 104 | 93 | 76 | 52 | | | | | | |

4XR 6

| MODEL | | DN | DIMENSION (mm) | | | | | | WEIGHT (kgs) | | | | | |
|-----------------|-----------------|--------|----------------|-----------------|-----------------|-----------------|-----------------|------|-----------------|-----------------|-----------------|-----------------|--|--|
| 1- 220V/240V | 3- 380V/415V | | P | M ₀₃ | M ₀₁ | T ₀₃ | T ₀₁ | P | M ₀₃ | M ₀₁ | T ₀₃ | T ₀₁ | | |
| 4XRm6/4-0.37 | 4XR6/4-0.37 | 1 1/2" | 369 | 285 | 275 | 654 | 644 | 3.2 | 6.9 | 6.4 | 10.1 | 9.6 | | |
| 4XRm6/6-0.55 | 4XR6/6-0.55 | 1 1/2" | 431 | 300 | 285 | 731 | 716 | 3.8 | 7.7 | 6.9 | 11.5 | 10.7 | | |
| 4XRm6/9-0.75 | 4XR6/9-0.75 | 1 1/2" | 522 | 325 | 300 | 847 | 822 | 4.7 | 8.9 | 7.7 | 13.6 | 12.4 | | |
| 4XRm6/12-1.1 | 4XR6/12-1.1 | 1 1/2" | 614 | 360 | 325 | 974 | 939 | 5.5 | 10.7 | 8.9 | 16.2 | 14.4 | | |
| 4XRm6/16-1.5 | 4XR6/16-1.5 | 1 1/2" | 737 | 390 | 360 | 1127 | 1097 | 6.6 | 12.2 | 10.7 | 18.8 | 17.3 | | |
| 4XRm6/22-2.2 | 4XR6/22-2.2 | 1 1/2" | 952 | 470 | 440 | 1422 | 1392 | 8.3 | 15.4 | 13.9 | 23.7 | 22.2 | | |
| - | 4XR6/30-3 | 1 1/2" | 1197 | - | 505 | - | 1702 | 10.6 | - | 16.9 | - | 27.5 | | |
| - | 4XR6/38-4 | 1 1/2" | 1441 | - | 565 | - | 2006 | 12.9 | - | 19.9 | - | 32.8 | | |
| - | 4XR6/48-5.5 | 1 1/2" | 1718 | - | 625 | - | 2343 | 15.2 | - | 22.9 | - | 38.1 | | |
| - | 4XR6/55-7.5 | 1 1/2" | 1993 | - | 685 | - | 2678 | 17.7 | - | 25.9 | - | 43.6 | | |



4XR 12

| MODEL | | DN | DIMENSION (mm) | | | | | | WEIGHT (kgs) | | | | | |
|-----------------|-----------------|--------|----------------|-----------------|-----------------|-----------------|-----------------|------|-----------------|-----------------|-----------------|-----------------|--|--|
| 1- 220V/240V | 3- 380V/415V | | P | M ₀₃ | M ₀₁ | T ₀₃ | T ₀₁ | P | M ₀₃ | M ₀₁ | T ₀₃ | T ₀₁ | | |
| 4XRm12/3-0.75 | 4XR12/3-0.75 | 1 1/2" | 402 | 325 | 300 | 727 | 702 | 3.9 | 6.9 | 7.7 | 12.8 | 11.6 | | |
| 4XRm12/5-1.1 | 4XR12/5-1.1 | 1 1/2" | 499 | 360 | 325 | 859 | 824 | 4.7 | 10.7 | 8.9 | 15.4 | 13.6 | | |
| 4XRm12/7-1.5 | 4XR12/7-1.5 | 1 1/2" | 596 | 390 | 360 | 986 | 956 | 5.5 | 12.2 | 10.7 | 17.7 | 16.2 | | |
| 4XRm12/11-2.2 | 4XR12/11-2.2 | 1 1/2" | 791 | 470 | 440 | 1261 | 1231 | 7.0 | 15.4 | 13.9 | 22.4 | 20.9 | | |
| - | 4XR12/15-3 | 1 1/2" | 985 | - | 505 | - | 1094 | 8.5 | - | 16.9 | - | 25.4 | | |
| - | 4XR12/19-4 | 1 1/2" | 1179 | - | 565 | - | 1744 | 10.0 | - | 19.9 | - | 29.9 | | |
| - | 4XR12/23-5.5 | 1 1/2" | 1405 | - | 625 | - | 2030 | 11.5 | - | 22.9 | - | 34.4 | | |
| - | 4XR12/28-7.5 | 1 1/2" | 1648 | - | 685 | - | 2333 | 13.4 | - | 25.9 | - | 39.3 | | |




4XR 8

| MODEL | | DN | DIMENSION (mm) | | | | | | WEIGHT (kgs) | | | | | |
|-----------------|-----------------|--------|----------------|-----------------|-----------------|-----------------|-----------------|------|-----------------|-----------------|-----------------|-----------------|--|--|
| 1- 220V/240V | 3- 380V/415V | | P | M ₀₃ | M ₀₁ | T ₀₃ | T ₀₁ | P | M ₀₃ | M ₀₁ | T ₀₃ | T ₀₁ | | |
| 4XRm8/5-0.55 | 4XR8/5-0.55 | 1 1/2" | 437 | 300 | 285 | 737 | 722 | 3.8 | 7.7 | 6.9 | 11.5 | 10.7 | | |
| 4XRm8/7-0.75 | 4XR8/7-0.75 | 1 1/2" | 513 | 325 | 300 | 838 | 813 | 4.4 | 8.9 | 7.7 | 13.3 | 12.1 | | |
| 4XRm8/9-1.1 | 4XR8/9-1.1 | 1 1/2" | 589 | 360 | 325 | 949 | 914 | 4.9 | 10.7 | 8.9 | 15.6 | 13.8 | | |
| 4XRm8/13-1.5 | 4XR8/13-1.5 | 1 1/2" | 741 | 390 | 360 | 1131 | 1101 | 6.1 | 12.2 | 10.7 | 18.3 | 16.8 | | |
| 4XRm8/17-2.2 | 4XR8/17-2.2 | 1 1/2" | 893 | 470 | 440 | 1363 | 1333 | 7.3 | 15.4 | 13.9 | 22.7 | 21.2 | | |
| - | 4XR8/24-3 | 1 1/2" | 1191 | - | 505 | - | 1696 | 9.4 | - | 16.9 | - | 26.3 | | |
| - | 4XR8/32-4 | 1 1/2" | 1495 | - | 565 | - | 2060 | 11.8 | - | 19.9 | - | 31.7 | | |
| - | 4XR8/40-5.5 | 1 1/2" | 1830 | - | 625 | - | 2455 | 14.4 | - | 22.9 | - | 37.0 | | |
| - | 4XR8/48-7.5 | 1 1/2" | 2134 | - | 685 | - | 2819 | 16.5 | - | 25.9 | - | 42.4 | | |



4XRS2

| MODEL | | DN | DIMENSION (mm) | | | | | | WEIGHT (kgs) | | | | | |
|-----------------|-----------------|--------|----------------|-----------------|-----------------|-----------------|-----------------|------|-----------------|-----------------|-----------------|-----------------|--|--|
| 1- 220V/240V | 3- 380V/415V | | P | M ₀₃ | M ₀₁ | T ₀₃ | T ₀₁ | P | M ₀₃ | M ₀₁ | T ₀₃ | T ₀₁ | | |
| 4XRSm2/5-0.25 | 4XRS2/5-0.25 | 1 1/2" | 260 | 265 | 265 | 625 | 625 | 2.3 | 5.9 | 5.9 | 8.2 | 8.2 | | |
| 4XRSm2/9-0.37 | 4XRS2/9-0.37 | 1 1/2" | 344 | 285 | 275 | 629 | 619 | 3.1 | 6.9 | 6.4 | 10.0 | 9.5 | | |
| 4XRSm2/13-0.55 | 4XRS2/13-0.55 | 1 1/2" | 428 | 300 | 285 | 728 | 713 | 4.0 | 7.7 | 6.9 | 11.7 | 10.9 | | |
| 4XRSm2/18-0.75 | 4XRS2/18-0.75 | 1 1/2" | 533 | 325 | 300 | 858 | 833 | 5.1 | 8.9 | 7.7 | 14.0 | 12.8 | | |
| 4XRSm2/25-1.1 | 4XRS2/25-1.1 | 1 1/2" | 680 | 360 | 325 | 1040 | 1005 | 6.6 | 10.7 | 8.9 | 17.3 | 15.5 | | |
| 4XRSm2/33-1.5 | 4XRS2/33-1.5 | 1 1/2" | 848 | 390 | 360 | 1238 | 1208 | 8.3 | 12.2 | 10.7 | 20.5 | 19.0 | | |
| 4XRSm2/48-2.2 | 4XRS2/48-2.2 | 1 1/2" | 1163 | 470 | 440 | 1633 | 1603 | 11.5 | 15.4 | 13.9 | 26.9 | 25.4 | | |
| - | 4XRS2/63-3 | 1 1/2" | 1487 | - | 505 | - | 1983 | 14.8 | - | 16.9 | - | 31.7 | | |




4XR 10

| MODEL | | DN | DIMENSION (mm) | | | | | | WEIGHT (kgs) | | | | | |
|-----------------|-----------------|--------|----------------|-----------------|-----------------|-----------------|-----------------|------|-----------------|-----------------|-----------------|-----------------|--|--|
| 1- 220V/240V | 3- 380V/415V | | P | M ₀₃ | M ₀₁ | T ₀₃ | T ₀₁ | P | M ₀₃ | M ₀₁ | T ₀₃ | T ₀₁ | | |
| 4XRm10/5-0.75 | 4XR10/5-0.75 | 1 1/2" | 437 | 325 | 300 | 762 | 737 | 3.8 | 8.9 | 7.7 | 12.7 | 11.5 | | |
| 4XRm10/7-1.1 | 4XR10/7-1.1 | 1 1/2" | 513 | 360 | 325 | 873 | 838 | 4.4 | 10.7 | 8.9 | 15.1 | 13.3 | | |
| 4XRm10/9-1.5 | 4XR10/9-1.5 | 1 1/2" | 589 | 390 | 360 | 979 | 949 | 4.9 | 12.2 | 10.7 | 17.1 | 15.6 | | |
| 4XRm10/13-2.2 | 4XR10/13-2.2 | 1 1/2" | 741 | 470 | 440 | 1211 | 1181 | 6.1 | 15.4 | 13.9 | 21.5 | 20.0 | | |
| - | 4XR10/18-3 | 1 1/2" | 931 | - | 505 | - | 1436 | 7.6 | - | 16.9 | - | 24.5 | | |
| - | 4XR10/24-4 | 1 1/2" | 1153 | - | 565 | - | 1718 | 9.1 | - | 19.9 | - | 29.0 | | |
| - | 4XR10/28-5.5 | 1 1/2" | 1343 | - | 625 | - | 1968 | 10.6 | - | 22.9 | - | 33.5 | | |
| - | 4XR10/34-7.5 | 1 1/2" | 1571 | - | 685 | - | 2256 | 12.3 | - | 25.9 | - | 38.2 | | |



4XRS3

| MODEL | | DN | DIMENSION (mm) | | | | | | WEIGHT (kgs) | | | | | |
|-----------------|-----------------|--------|----------------|-----------------|-----------------|-----------------|-----------------|------|-----------------|-----------------|-----------------|-----------------|--|--|
| 1- 220V/240V | 3- 380V/415V | | P | M ₀₃ | M ₀₁ | T ₀₃ | T ₀₁ | P | M ₀₃ | M ₀₁ | T ₀₃ | T ₀₁ | | |
| 4XRSm3/4-0.25 | 4XRS3/4-0.25 | 1 1/2" | 239 | 265 | 265 | 504 | 504 | 2.1 | 5.9 | 5.9 | 8.0 | 8.0 | | |
| 4XRSm3/6-0.37 | 4XRS3/6-0.37 | 1 1/2" | 281 | 285 | 275 | 566 | 566 | 2.5 | 6.9 | 6.4 | 9.4 | 8.9 | | |
| 4XRSm3/9-0.55 | 4XRS3/9-0.55 | 1 1/2" | 344 | 300 | 285 | 644 | 629 | 3.2 | 7.7 | 6.9 | 10.9 | 10.1 | | |
| 4XRSm3/12-0.75 | 4XRS3/12-0.75 | 1 1/2" | 407 | 325 | 300 | 732 | 707 | 3.8 | 8.9 | 7.7 | 12.7 | 11.5 | | |
| 4XRSm3/18-1.1 | 4XRS3/18-1.1 | 1 1/2" | 533 | 360 | 325 | 839 | 858 | 5.1 | 10.7 | 8.9 | 15.8 | 14.0 | | |
| 4XRSm3/25-1.5 | 4XRS3/25-1.5 | 1 1/2" | 680 | 390 | 360 | 1070 | 1040 | 6.6 | 12.2 | 10.7 | 18.8 | 17.3 | | |
| 4XRSm3/33-2.2 | 4XRS3/33-2.2 | 1 1/2" | 848 | 470 | 440 | 1318 | 1288 | 8.4 | 15.4 | 13.9 | 23.8 | 22.3 | | |
| - | 4XRS3/44-3 | 1 1/2" | 1079 | - | 505 | - | 1584 | 10.8 | - | 16.9 | - | 27.7 | | |
| - | 4XRS3/58-4 | 1 1/2" | 1373 | - | 565 | - | 1938 | 13.8 | - | 19.9 | - | 33.7 | | |




4XRS5

| MODEL | | DN | DIMENSION (mm) | | | | WEIGHT (kgs) | | | | | |
|------------------|------------------|--------|----------------|------------------|-----------------|------------------|-----------------|------|------------------|-----------------|------------------|-----------------|
| 1 - 220V/240V | 3 - 380V/415V | | P | M _{tot} | M _{tr} | T _{tot} | T _{tr} | P | M _{tot} | M _{tr} | T _{tot} | T _{tr} |
| 4XRSm5/4-0.37 | 4XRS/4-0.37 | 1½"1½" | 251 | 285 | 275 | 536 | 526 | 2.2 | 6.9 | 6.4 | 9.1 | 8.6 |
| 4XRSm5/6-0.55 | 4XRS/6-0.55 | 1½"1½" | 299 | 300 | 285 | 599 | 584 | 2.6 | 7.7 | 6.9 | 10.3 | 9.5 |
| 4XRSm5/8-0.75 | 4XRS/8-0.75 | 1½"1½" | 347 | 325 | 300 | 672 | 647 | 3.1 | 8.9 | 7.7 | 12.0 | 10.8 |
| 4XRSm5/12-1.1 | 4XRS/12-1.1 | 1½"1½" | 443 | 360 | 325 | 803 | 768 | 4.0 | 10.7 | 8.9 | 14.7 | 12.9 |
| 4XRSm5/17-1.5 | 4XRS/17-1.5 | 1½"1½" | 563 | 390 | 360 | 953 | 923 | 5.1 | 12.2 | 10.7 | 17.3 | 15.8 |
| 4XRSm5/25-2.2 | 4XRS/25-2.2 | 1½"1½" | 755 | 470 | 440 | 1225 | 1195 | 7.0 | 15.4 | 13.9 | 22.4 | 20.9 |
| - | 4XRS/33-3 | 1½"1½" | 947 | - | 505 | - | 1452 | 8.8 | - | 16.9 | - | 25.7 |
| - | 4XRS/43-4 | 1½"1½" | 1187 | - | 565 | - | 1752 | 11.1 | - | 19.9 | - | 31.0 |
| - | 4XRS/57-5.5 | 1½"1½" | 1523 | - | 625 | - | 2148 | 14.3 | - | 22.9 | - | 37.2 |



4XRS8

| MODEL | | DN | DIMENSION (mm) | | | | WEIGHT (kgs) | | | | | |
|------------------|------------------|-------|----------------|------------------|-----------------|------------------|-----------------|------|------------------|-----------------|------------------|-----------------|
| 1 - 220V/240V | 3 - 380V/415V | | P | M _{tot} | M _{tr} | T _{tot} | T _{tr} | P | M _{tot} | M _{tr} | T _{tot} | T _{tr} |
| 4XRSm8/3-0.55 | 4XRS/3-0.55 | 1½"2" | 331 | 300 | 285 | 631 | 615 | 3.6 | 7.7 | 6.9 | 11.3 | 10.5 |
| 4XRSm8/5-0.75 | 4XRS/5-0.75 | 1½"2" | 415 | 325 | 300 | 740 | 715 | 4.4 | 8.9 | 7.7 | 13.3 | 12.1 |
| 4XRSm8/7-1.1 | 4XRS/7-1.1 | 1½"2" | 499 | 360 | 325 | 859 | 824 | 5.0 | 10.7 | 8.9 | 15.7 | 13.9 |
| 4XRSm8/10-1.5 | 4XRS/10-1.5 | 1½"2" | 625 | 390 | 360 | 1015 | 985 | 6.0 | 12.2 | 10.7 | 18.2 | 16.7 |
| 4XRSm8/15-2.2 | 4XRS/15-2.2 | 1½"2" | 835 | 470 | 440 | 1305 | 1275 | 7.7 | 15.4 | 13.9 | 23.1 | 21.6 |
| - | 4XRS/19-3 | 1½"2" | 1003 | - | 505 | - | 1508 | 9.0 | - | 16.9 | - | 25.9 |
| - | 4XRS/25-4 | 1½"2" | 1255 | - | 565 | - | 1820 | 11.1 | - | 19.9 | - | 31.0 |
| - | 4XRS/36-5.5 | 1½"2" | 1675 | - | 625 | - | 2300 | 14.4 | - | 22.9 | - | 37.3 |



Application

- Circulation and transfer of clean, chemically non-aggressive water and other liquids
- Water supply & irrigation
- Water circulation in air conditioning systems

Operating conditions

- Delivery: up to 220 m³/h
- Head: up to 95 m
- Liquid temperature:
Standard: -10°C to 85°C Upon request: -20°C to 120°C
- Maximum operating pressure: 12 bar (PN12)
Anti-clockwise rotation when facing pump's suction port
- Impeller: AISI304/HT200
- Mechanical seal in compliance with DIN 24960
- Lubricated by internal recirculating pumped liquid
Counter flange available on request

Motor

- Closed construction, external ventilation
- Insulation class: F
- Protection class: IP54
- Performance in compliance with CEI 2-3 (IEC 34.1)
- Max. ambient temperature: +40°C
- Overload protection

Construction features

- Single-impeller centrifugal pump featuring axial intake and radial discharge
- Inlet and outlet DN in compliance with EN 733(ex DIN 24255)and UNI 7467
- Flanges in compliance with UNI 2236 and DIN 2532
Rear entry (impeller, control valve and motor can be extracted without disconnecting the pump body from the pipes)



Accessories on request

- Galvanised iron threaded counter flanges
- Flanged tapered coupling
- Pump and motor sealing gasket

XSTm32-125/11

