


~ 2900 r.p.m. CA (No EN 733; only CA version)


50-315

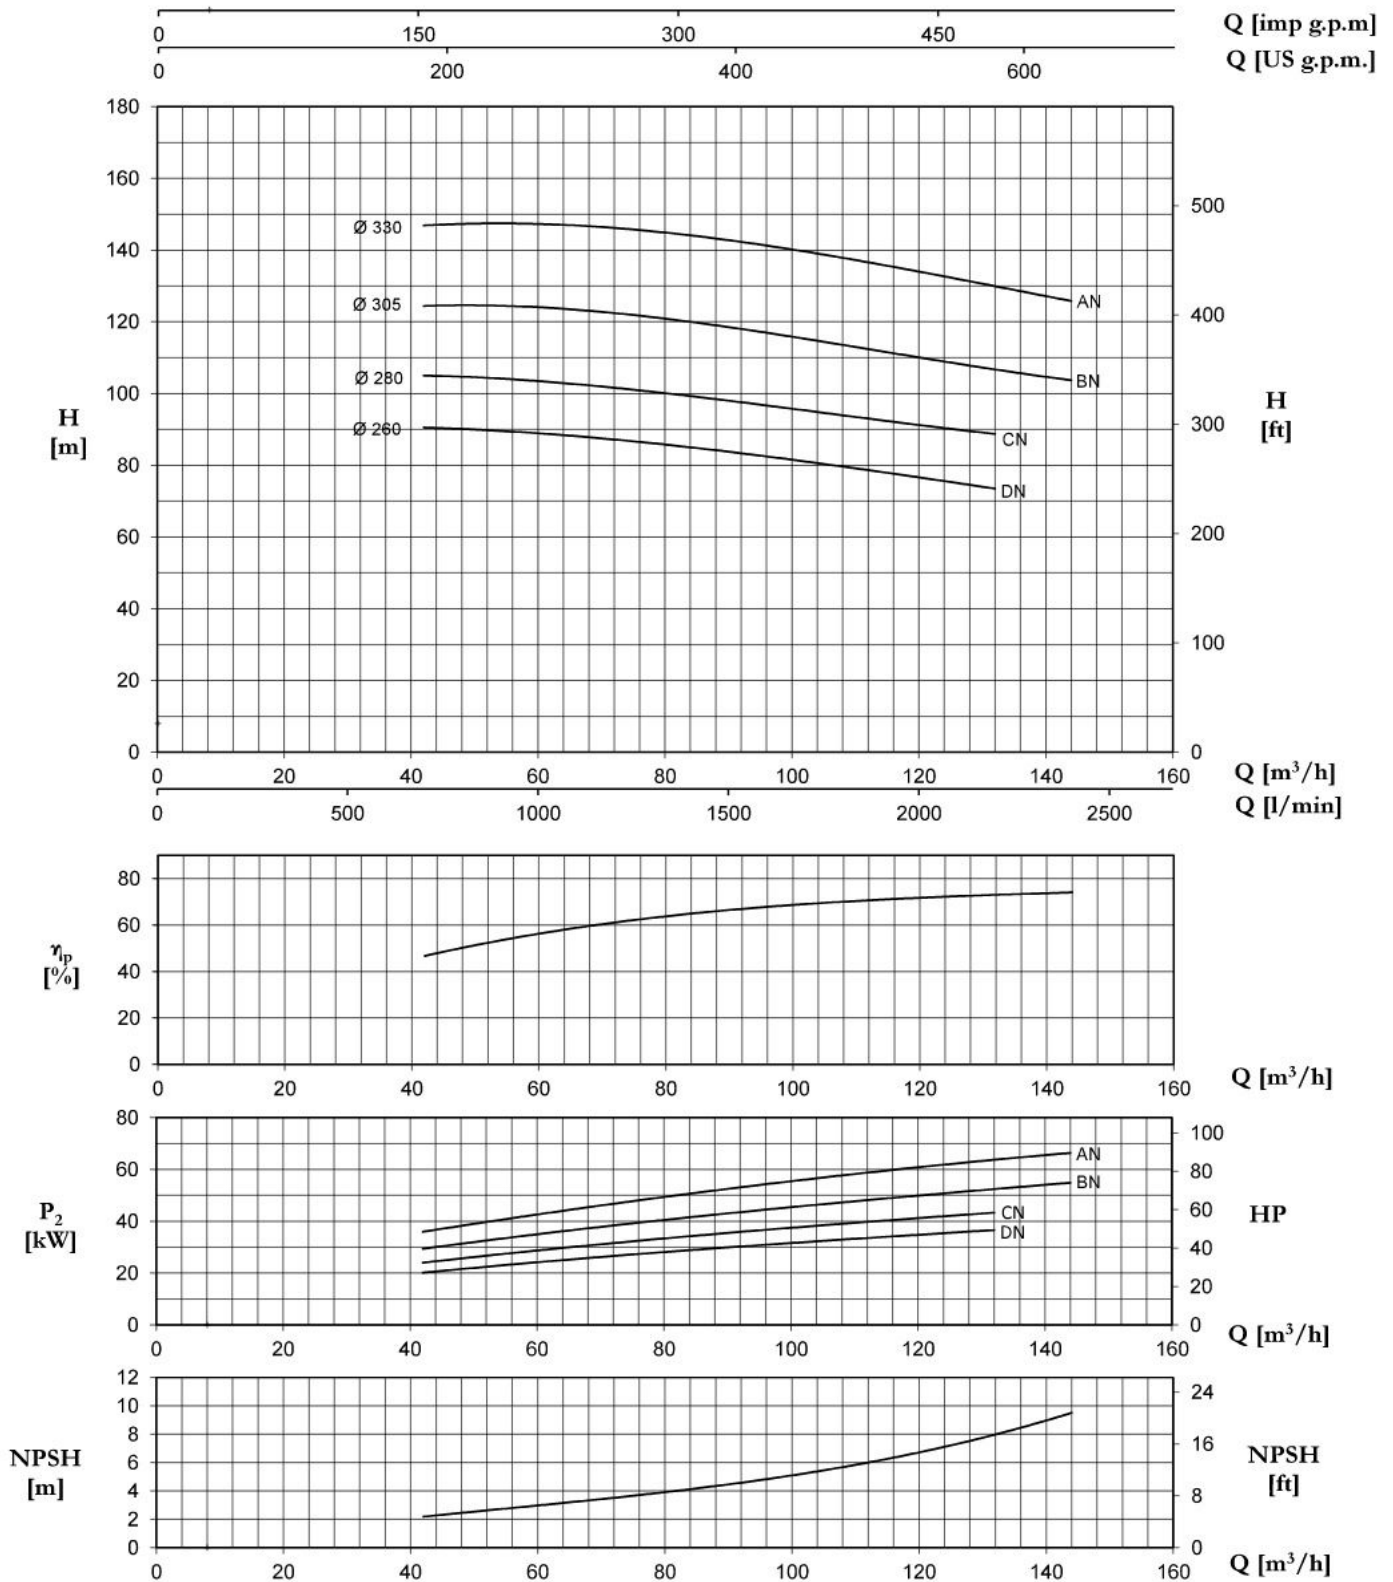

Tolerance: ISO 9906:2012 - Grade 3B

TYPE	Nominal Power (kW)	Motor Size	Q (m³/h - l/min)								
			0	42	54	66	78	96	120	132	144
			0	700	900	1100	1300	1600	2000	2200	2400
H (m) / pump input power (kW)											
50-315DN	37	200L	87,8 11,19	90,4 20,11	89,9 22,91	88,2 25,41	86,0 27,71	82,4 30,91	76,9 34,81	73,4 36,56	
50-315CN	45	225M	101,8 13,32	105,0 23,97	104,3 27,25	102,7 30,21	100,3 32,85	96,7 36,68	91,3 41,26	88,7 43,26	
50-315BN	55	250M	122,3 17,44	124,3 29,30	124,7 33,28	123,6 36,80	121,3 39,85	116,6 44,41	110,1 50,01	107,1 52,39	103,5 54,83
50-315AN	75	280S	146,1 22,75	146,9 35,89	147,4 40,53	146,9 44,71	145,3 48,67	141,2 54,26	134,1 60,84	130,0 63,78	125,8 66,34

100-250

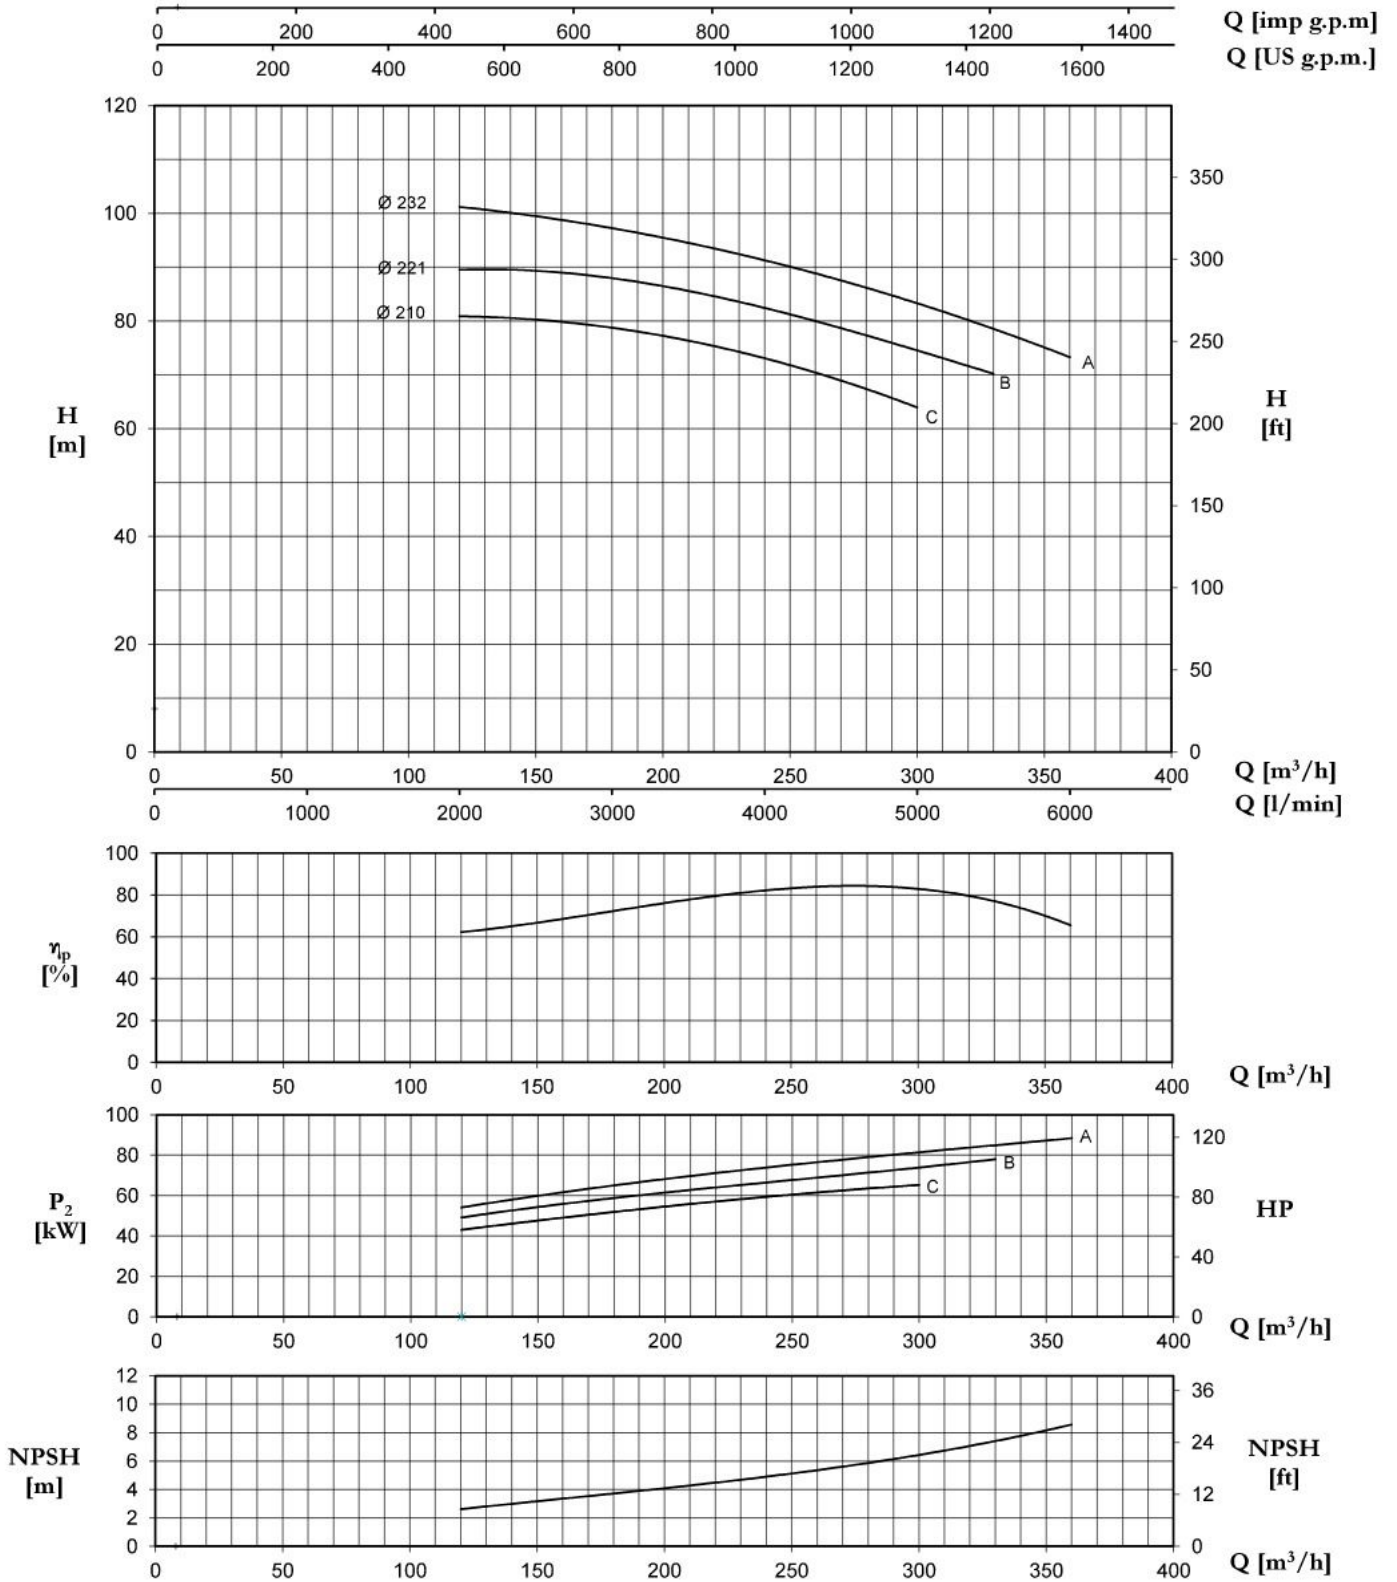

Tolerance: ISO 9906:2012 - Grade 3B

TYPE	Nominal Power (kW)	Motor Size	Q (m³/h - l/min)									
			0	120	144	168	195	225	270	300	330	360
			0	2000	2400	2800	3250	3750	4500	5000	5500	6000
H (m) / pump input power (kW)												
100-250 C	55	250M	79,9	81,0	80,4	79,4	77,7	74,9	68,6	64,1		
	75	280S	25,58	43,1	46,7	50,2	53,9	57,7	62,4	65,3		
100-250 B	75	280S	90,0	89,9	89,2	88,2	86,8	84,7	78,4	73,2	70,9	
			29,82	49,11	53,30	57,27	60,82	64,38	70,55	73,87	77,92	
100-250 A	90	280M	100,5	100,7	99,8	98,4	96,4	93,2	87,1	81,8	78,7	74,0
			32,74	54,04	58,71	63,34	67,40	71,65	77,67	81,17	85,71	88,00