


S

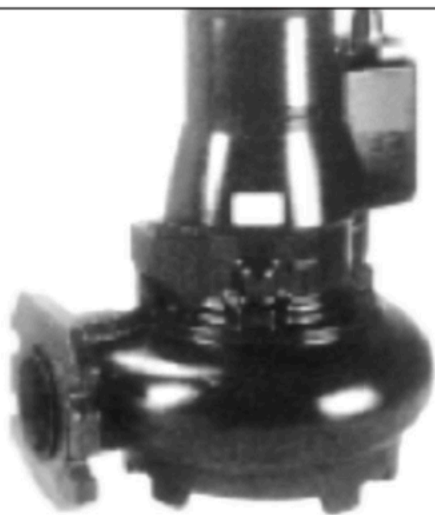

SUBMERSIBLE CENTRIFUGAL RADIAL PUMP SINGLE IMPELLER MODEL "S", WITH DOUBLE MECHANICAL SEAL, FOR INDUSTRIAL AND DEPURATION PLANT.

THE FOLLOWING IMPELLERS ARE AVAILABLE:

RECESSED, SINGLE CHANNEL, VORTEX AND WITH GRINDER.

up to **3600** mc/h

up to **90** m

up to **120** °C for standard execution

Double mechanical Seal

up to **3550** rpm

flanged UNI PN 10, DN 50÷300 mm

Cast-iron EN-GJL-250 for standard.

Possibility of castings in: **nodular cast-iron** EN-GJS-400, **bronze** G-CuSn10, **Carbon steel**, AISI 304, AISI 316, **Duplex**, **Super-duplex**, **Hastelloy C**