



Peripheral electric pumps suitable for applications requiring high pressures in relation to moderate capacities and outputs. Cast Iron PUMP BODY & BRACKET; stamped Brass alloy IMPELLER; Carbon Steel or Stainless Steel Shaft; ceramic-graphite MECHANICAL SEAL. Close, self-ventilated induction ELECTRIC MOTOR; Insulation Class F; IP44 Protection. Standard supply with 230V - 50HZ Single phase with built-in thermal protection. Other voltage & frequency are available based on requirement.

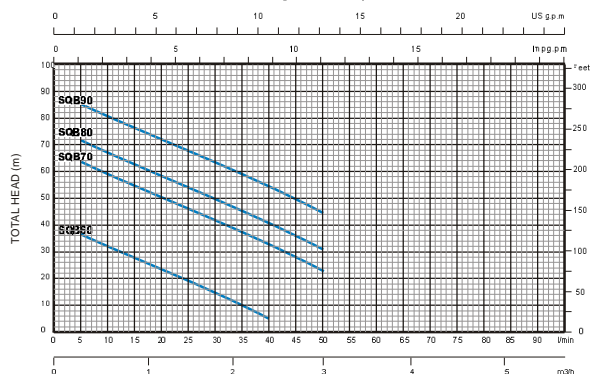


Series SQB

Code	Pompa Pump For. pe	HP HP CV	KW KW KW	Motore Motor Moteur	Aspirazione Mandata Suction Delivery	Prestazioni Performance Performances Q (l/min) H (m)	Peso Weight (kg)
S010001	SQB60	0.50	0.37	230M	1 / 1	5-40 35-3	5.8
S010002	SQB70	0.75	0.55	230M	1 / 1	5-55 52-4	8.8
S010003	SQB80	1.00	0.75	230M	1.5 / 1.5	5-60 69-4	9.5
S010004	SQB90	1.50	1.10	230M	1.5 / 1.5	5-80 84-4	17.0

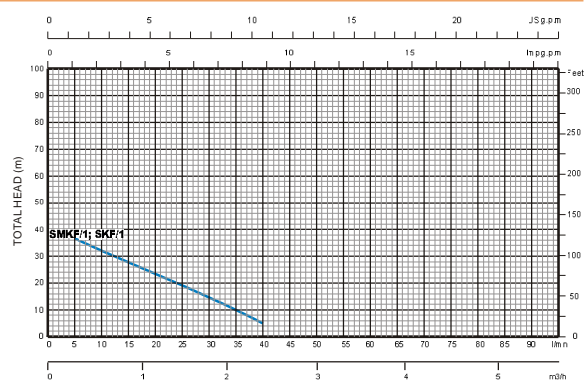


Code	Pompa Pump For. pe	HP HP CV	KW KW KW	Motore Motor Moteur	Aspirazione Mandata Suction Delivery	Prestazioni Performance Performances Q (l/min) H (m)	Peso Weight (kg)
S010005	SMKF/1	0.50	0.37	230M	1 / 1	5-40 35-3	5.9
S010006	SKF/1	0.75	0.55	230M	1 / 1	5-40 35-3	6.0

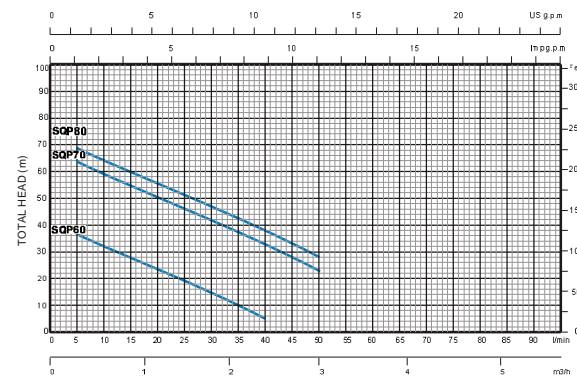

Series SQP

Code	Pompa Pump For. pe	HP HP CV	KW KW KW	Motore Motor Moteur	Aspirazione Mandata Suction Delivery	Prestazioni Performance Performances Q (l/min) H (m)	Peso Weight (kg)
S010007	SQP60	0.50	0.37	230M	1 / 1	5-40 35-3	5.8
S010008	SQP70	0.75	0.55	230M	1 / 1	5-55 52-4	8.8
S010009	SQP80	1.00	0.75	230M	1 / 1	5-60 69-4	9.5

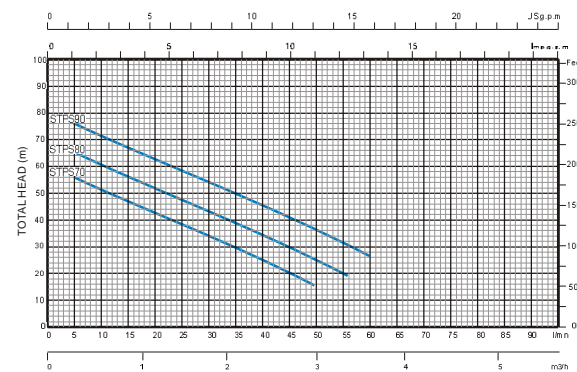

Series STPS

Code	Pompa Pump For. pe	HP HP CV	KW KW KW	Motore Motor Moteur	Aspirazione Mandata Suction Delivery	Prestazioni Performance Performances Q (l/min) H (m)	Peso Weight (kg)
S010010	STPS70	0.75	0.55	230M	1 / 1	5-50 55-10	8.7
S010011	STPS80	1.00	0.75	230M	1 / 1	5-60 65-10	10.8
S010012	STPS90	1.50	1.10	230M	1.5 / 1.5	5-70 77-10	18.0

