

EBARA



# Submersible Semi-open Vortex Sewage Pumps

Model DVU



water | wastewater | sewage | drainage



**EBARA**

**EBARA** Fluid Handling

*an EBARA International Corporation company*

# Model DVU


## Features

- **Air filled, heavy duty motor, rated for 20 starts/hour**, dissipates heat easily, operates cooler with higher efficiencies; longer service life with lower operating costs
- **Built-in motor protection with autcut**, protects motor against overheating, single phasing, and no load; saves money on costly motor replacement
- **Molded cable** prevents capillary action; reduces maintenance costs
- **60,000 hour bearings**; ensures long, dependable operation and lowers maintenance costs
- **Large solids handling capabilities** prevents clogging
- **Semi-open vortex type recessed impeller**; vortex action prevents clogging and handles stringy material better vs moving pumpage through impeller vanes; provides durability, high reliability, and lowers maintenance costs
- **High quality stainless steel shaft**; provides high tensile strength, corrosion resistance, longer life, and lower maintenance costs
- **Double mechanical seals**-silicon carbide lower seals, carbon/ceramic upper - hard faced upper and lower seals operate in an oil bath; providing longer service life and lower maintenance costs
- High wire to water efficiencies reduced power consumption; reduced cost of operation
- **Available for slide rail installations** provides ease of maintenance for small sump type installations
- Three phase, FM explosion proof, Class 1, Div. 1, Group C & D available in DVFMU series 2 HP and above

## Standard Specifications

<b>Design</b>	Discharge	2, 3, 4 inch
	Horsepower	2 to 5 HP, Single Phase 1 to 2 HP, Three Phase
	Capacity	16 to 430 GPM
	Total head	9 to 66 feet
	Max.Liquid temp.	104°F/40°C
<b>Speed</b>		1800 RPM
<b>Materials</b>	Casing	Cast Iron
	Impeller	Cast Iron
	Shaft	403 Stainless Steel
	Motor Frame	Cast Iron
	Fastener	304 Stainless Steel
<b>Construction</b>	<b>Mechanical Seal</b>	
	Double Mechanical Seal	
	Material – Upper	Carbon/Ceramic
	Material – Lower	Silicon Carbide/Silicon Carbide
	Impeller Type	Semi-open Recessed Vortex
	Bearing	Prelubricated Ball Bearing
	Motor	Air-filled, Insulation Class F
	Single Phase	208/230V
	Three Phase	208/230V, 460V
	Service Factor	1.15
	Motor Protection	Built-in Auto cut - overload, no load, out of phase, single phasing protection
<b>Submersible Cable</b>		33 ft. standard cable length, Optional 66 ft.
<b>Accessories</b>		Optional QDC System

## DVU selection chart

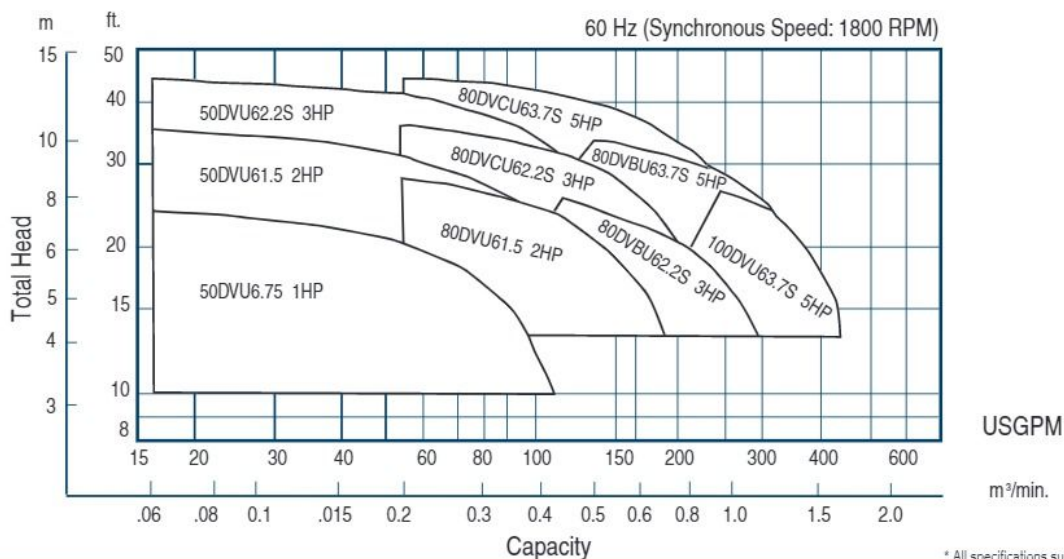

\* All specifications subject to change without notice.



### EBARA Fluid Handling

1651 Cedar Line Drive • Rock Hill, SC 29730 • t (803) 327-5005 • f (803) 327-5097

[www.pumpsebara.com](http://www.pumpsebara.com)

© 2011 EBARA International Corporation, All rights reserved.

EFHDVU0116