



Code	Pompa Furr.p Fonpe	HP hP CV	KW KW KW	Motore Motor Moteur	Aspirazione Mandata Suction Delivery	Prestazioni Performance Performances	Peso Weight (kg)
						Q (l/min)	H (m)
S010013	SDB60	0.50	0.37	230M	1 / 1	5-40	35-3
S010014	SDB70	0.75	0.55	230M	1 / 1	5-55	52-4
S010015	SDB80	1.00	0.75	230M	1 / 1	5-60	69-4
S010016	SDB60 Br	0.50	0.37	230M	1 / 1	5-40	35-3

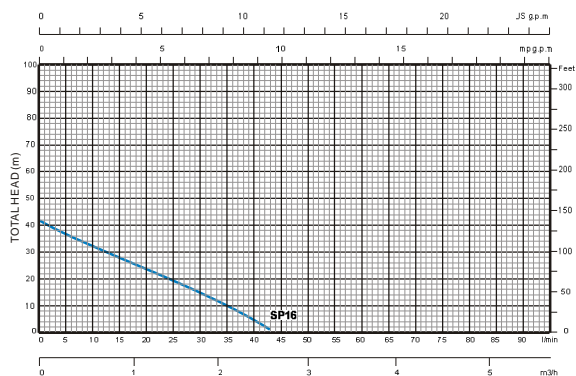


Pompa tipo Type of Pump Bomba tipo	Potenza nominale Rated power Potencia nominal		KvV assorbiti KvV absorbed KvV absorbidos	Condensatore Capacitor Condensador		Corrente assorbita Current absorbed Corriente absorbida	PRESTAZIONI IDRAULICHE-HYDRAULIC PERFORMANCE-PRESTACIONES IDRAULICAS CAPACITÀ FLUSSO-CAPACITY-CAUDAL							
	KW	HP		uF	V		A	l/min	10	15	20	25	30	35
MOTORE MONOFASE SINGLE PHASE MONOFASICO 220-240V 50 Hz							m/h	0,6	0,9	1,2	1,5	1,8	2,1	
							V	H=PREVALEZZA TOTALE IN METRI DI COLONNA D'ACQUA TOTAL HEAD PER METER OF WATER COLUMN ALTURA DE ELECCIÓN TOTAL EN METROS DE COLUMNA DE AGUA						
SP16(GHISA)	0,3	0,4	0,48	10	450	2,4		33	28	23	17	12	7,5	

TIPO POMPA PUMP TYPE TIPO BOMBA	INGOMBRI E DIMENSIONI IN mm OVERALL DIMENSIONES EN mm											PESO WEIGHT	
	F	H	M1	L	C	W	M	M1	N	M1	S	DMM	Kg
SP 16	210	113	73	108	178	73	60	116	112	139	08	6"	15

**CENTRIFUGAL electric pumps** suitable for general pumping of clean water and liquids which are neither mechanically nor chemically aggressive for the pump components. Cast iron Pump body & Motor bracket. Noryl Impeller reinforced with fibreglass (GFV2V) or Stamped Brass Alloy. Stainless Steel Shaft (welded). Ceramic-graphite Mechanical Seal. Close, Self-ventilated Electric Motor. Insulation class F, IP44 Protection. Standard 230V-50HZ Single phase with built-in thermal protection up to 2.2KW. For Three phase pumps and those single-phase with an output greater than 2.2KW, the protection should be provided by the user. Max. Temperature of pumped liquid: 50C with Noryl Impeller, 90C with brass Impeller.

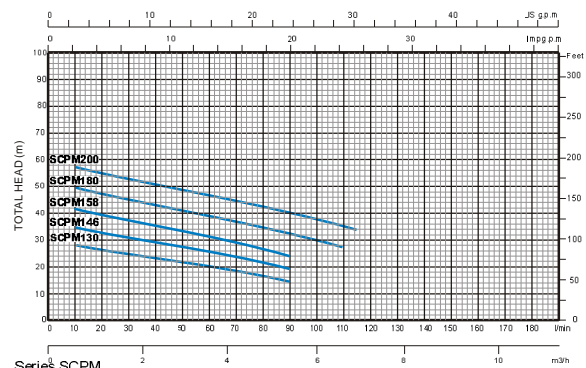

Code	Pompa Furr.p Pompe	HP hP CV	KW KW KW	Motore Motor Moteur	Aspirazione Mandata Suction Delivery	Prestazioni Performance Performances	Peso Weight (kg)
						Q (l/min)	H (m)
S020001	SCPM130	0.50	0.37	230M	1 / 1	20-90	18-12
S020002	SCPM146	0.75	0.55	230M	1 / 1	20-90	23-18
S020003	SCPM158	1.00	0.75	230M	1 / 1	20-90	28-22
S020004	SCPM180	1.50	1.10	230M	1 / 1	20-110	35-26
S020005	SCPM200	2.00	1.50	230M	1 / 1	20-115	42-31

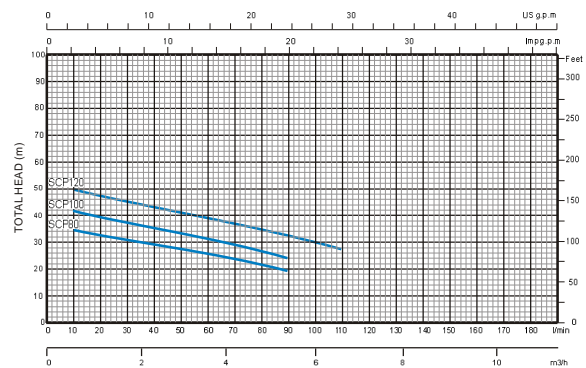

Code	Pompa Furr.p Pompe	HP hP CV	KW KW KW	Motore Motor Moteur	Aspirazione Mandata Suction Delivery	Prestazioni Performance Performances	Peso Weight (kg)
						Q (l/min)	H (m)
S020006	SCP80	0.75	0.55	230M	1 / 1	20-90	23-18
S020007	SCP100	1.00	0.75	230M	1 / 1	20-90	28-22
S020008	SCP120	1.50	1.10	230M	1 / 1	20-110	35-26

